




# Z100

## 15 [381] DIAMETER MAIN ROOF DRAIN LOW SILHOUETTE DOME

### SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

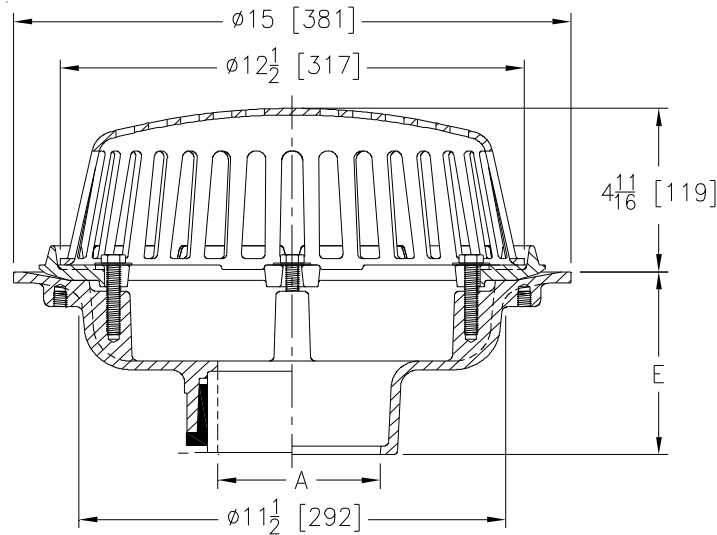

| A<br>Pipe Size In.[mm] | Approx.<br>Wt.<br>Lbs. [kg] | Dome Open Area<br>Sq. In. [cm <sup>2</sup> ] |
|------------------------|-----------------------------|----------------------------------------------|
| 2,3,4 [51,76,102]      | 26 [12]                     | 103 [665]                                    |
| 6 [152]                | 27 [12]                     |                                              |
| 8 [203]                | 28 [13]                     |                                              |

### ENGINEERING SPECIFICATION: ZURN Z100

15" [381mm] Diameter roof drain. Dura-Coated cast iron body with combination membrane flashing clamp/gravel guard and low silhouette Poly-Dome.

### OPTIONS (Check/specify appropriate options)

#### PIPE SIZE

3, 4, 6 [76,102,152]  
2, 3, 4, 6, 8 [51,76, 102, 152, 203]  
2, 3, 4, 6, 8 [51,76, 102, 152, 203]  
2, 3, 4 [51,76,102]  
6 [152]

#### (Specify size/type) OUTLET

\_\_\_\_\_ IC Inside Caulk  
\_\_\_\_\_ IP Threaded  
\_\_\_\_\_ NH No-Hub  
\_\_\_\_\_ NL Neo-Loc  
\_\_\_\_\_ NL Neo-Loc

#### E BODY HT. DIM.

5-1/4 [133]  
3-3/4 [95]  
5-1/4 [133]  
4-9/16 [116]  
5-7/16 [112]

#### PREFIXES

\_\_\_\_\_ Z D.C.C.I. Body with Poly-Dome\*  
\_\_\_\_\_ ZA D.C.C.I. Body with Aluminum Dome

\_\_\_\_\_ ZC D.C.C.I. Body with Cast Iron Dome  
\_\_\_\_\_ ZRB D.C.C.I. Body with Plain Bronze Dome

#### SUFFIXES

\_\_\_\_\_ -AC Angular Underdeck Clamp  
\_\_\_\_\_ -AR Acid Resistant Epoxy Coated  
\_\_\_\_\_ -AW 3/4 [19] to 4 [102] Adj. Water Level Regulator  
(Specify Height) (ZC Only)  
\_\_\_\_\_ -C Underdeck Clamp  
\_\_\_\_\_ -DE Deck Extension  
\_\_\_\_\_ -DP Top-Set® Deck Plate (Replaces both the -C and -R)  
\_\_\_\_\_ -DR Top-Set® Drain Riser  
\_\_\_\_\_ -E Static Extension 1 [25] thru 4 [102] (Specify Ht.)  
\_\_\_\_\_ -EA Adjustable Extension Assembly  
2-1/8 [54] thru 3-1/2 [89]  
\_\_\_\_\_ -EB Top-Set® Adjustable Extension Assembly  
\_\_\_\_\_ -FG Flush Grate  
\_\_\_\_\_ -G Galvanized Cast Iron  
\_\_\_\_\_ -HD 6-3/4[171] High Aluminum Dome Strainer  
(148 Sq. In. [955 cm<sup>2</sup>] Open Area) (ZA Only)

\_\_\_\_\_ -R Roof Sump Receiver  
\_\_\_\_\_ -SC Secondary Clamp Collar  
\_\_\_\_\_ -SS Stainless Steel Mesh Screen Over Dome  
\_\_\_\_\_ -ST Dome with Solid Top (ZA & ZC Only)  
\_\_\_\_\_ -TC Neo-Loc Test Cap Gasket  
(2, 3, 4 [51, 76, 102] NL Bottom Outlet Only)  
\_\_\_\_\_ -VP Vandal-Proof Secured Top  
\_\_\_\_\_ -W2 2 [51] Internal Water Dam  
\_\_\_\_\_ -W3 3 [76] Internal Water Dam  
\_\_\_\_\_ -W4 4 [102] Internal Water Dam  
\_\_\_\_\_ -84 Stainless Steel Perforated Gravel Guard  
\_\_\_\_\_ -85 Stainless Steel Perforated Extension  
\_\_\_\_\_ -89 2 [51] High External Water Dam  
\_\_\_\_\_ -90 90° Threaded Side Outlet Body

\* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation  
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929  
In Canada | Zurn Industries Limited  
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292  
[www.zurn.com](http://www.zurn.com)

Rev. N  
Date: 09/25/2017  
C.N. No. 137784  
Prod. | Dwg. No. Z100