



TEMPORARY STREET PRIVILEGE PERMIT

Engineering Dept. • Phone: (608) 789-7505 • Fax: (608) 789-8184
<http://www.cityoflacrosse.org> engineering@cityoflacrosse.org

Permit No:	2021-014
Date:	03/30/21
Parcel ID:	

STATUS:	APPROVED	Permit Type:	TSP
---------	----------	--------------	-----

Name: Market & Johnson - Tyler Schulz (Project Manager)			
Address: 1652 Lakeshore Drive			
City: La Crosse	State: WI	Zip Code: 54603	
Phone:	Cell: 608-797-5144	Fax:	Email: tschulz@market-johnson.com
Vehicle License Number (If Applicable):		Tag #:	

Location: Pine St./East Avenue			
Area to be occupied:	Traffic Lane(s)	Parking Lane(s)	Boulevard Sidewalk Alley

Purpose for permit: Utility Work for UWL Fieldhouse Project

Additional Conditions:
Please see road closure phases 1 & 2 *Certificates of Ins. update received 3-30-21 ✓ KN*

Start Date: April 6, 2021	End Date: 90 Days
---------------------------	-------------------

Invoice #: Pending	Fee: \$ Pending (\$35.00 first 5 days, \$2.00 each additional day)
--------------------	--

Permit issued by: *BPW, per [signature]*

Comments:
Will look to extend permit past 90 days.

↳ will go to BPW in early May.
Require Certificate of Liability Insurance update - List City of La Crosse as add'l insured *Received*

The undersigned understands and agrees to the following: 1) The permitted work shall comply with all permit provisions and conditions listed on and attached to this form; 2) That insurance requirements shall be met prior to approval either by submitting information with application or by keeping current information on file with the Engineering Dept.; 3) The applicant shall contact City Dispatch and the City Traffic Engineer 24 hours prior to the closure of any traffic lanes and shall provide an estimate of the duration of the closure. Temporary traffic control shall be provided and maintained by the applicant and shall comply with Part 6 of the *Manual on Uniform Traffic Control Devices (MUTCD)*.

Note: Once invoiced, application fees may not be refunded. Details of permit, including dates, may be modified with approval of the Engineering Department.

02/15/2021
(PRINT) AUTHORIZED REPRESENTATIVE

Tgc [signature]

(SIGN) AUTHORIZED REPRESENTATIVE

Project Manager - M&J
TITLE

02/15/2021
DATE

Project Manager - M&J
TITLE

02/15/2021
DATE



City of La Crosse, Wisconsin

City Hall
400 La Crosse Street
La Crosse, WI 54601

File Complete

File Number: 21-0397

File ID: 21-0397	Type: General Item	Status: Approved
Version: 1	Reference:	In Control: Board of Public Works
		File Created: 03/18/2021
File Name: UWL FIELDHOUSE UTILITIES		Final Action: 03/22/2021
Title: UWL Request to place Utilities in 1800 - 2000 Pine Street for Fieldhouse Project.		

Routing:

Agenda Date: 03/22/2021

Sponsors:

Effective Date:

Attachments: UWL - Street Privilege Permit Application for Fieldhouse Utilities in Pine Street, Existing City Utility Location Map, UWL Fieldhouse Utility Plan

Enactment Number:

Contact:

Hearing Date:

Drafter: crandallj@cityoflacrosse.org


Effective Date:

Related Files:

History of Legislative File

Ver- sion:	Acting Body:	Date:	Action:	Sent To:	Due Date:	Return Date:	Result:
1	Board of Public Works	03/22/2021	APPROVED				Pass

Text of Legislative File 21-0397

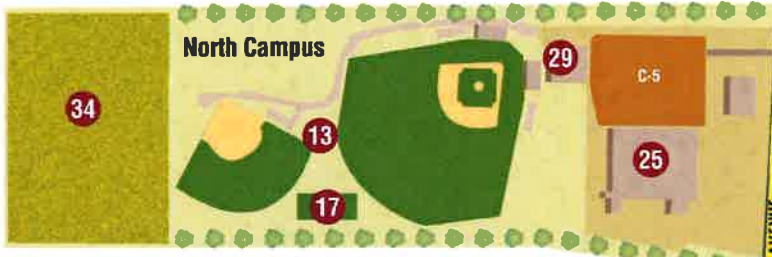

PROPOSED 2 HOUR

UNIVERSITY of WISCONSIN LA CROSSE

www.uwlax.edu
1725 State St. | La Crosse, WI 54601


- Commuter Parking (C Lots)
- Resident Parking (R Lots)

- Motorcycle/Moped Parking
- Parking Pay Station

↑
1/4 mile



Notes from 03/26/21 Meeting
 -Flipping Phases B&C
 -Move Construction of FH-1 to Phase 4
 -Chilled Tie-in to Mitchell to be included with Phase 4
 -Dumpsters to be moved to Parking Lot C-8
 -Parking Lot C-8 Accessible from Campbell
 -Emergency Vehicles will have access through the parking lot C-8

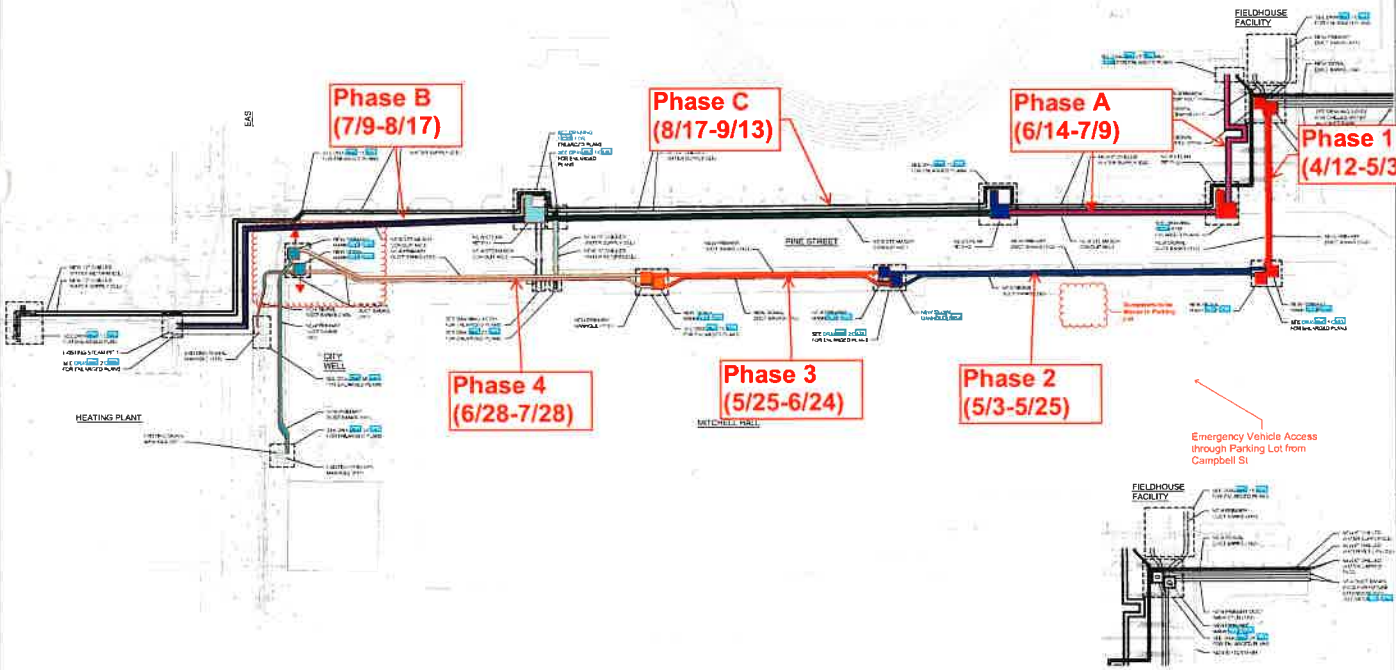

1 OVERALL SITE UTILITY PLAN - NEW CONSTRUCTION



2 PARTIAL SITE UTILITY PLAN - NEW CONSTRUCTION



ARCHITECTURE
 ENGINEERING
 INTERIOR DESIGN

INR


RDG

BING & CHATEAU

FIELDHOUSE AND SOCCER
 SUPPORT FACILITY
 UNIVERSITY OF WISCONSIN - LA CROSSE
 LA CROSSE, WI

DATE: 06/01/2021
 TIME: 10:00 AM
 DRAWN BY: J. SMITH
 CHECKED BY: M. JONES
 PROJECT NO: 2019-0020
 SHEET NO: C002


ID	Task Name	Duration	Start	Finish	Pr
1	UWL Fieldhouse - Site Utility Overall	138 days	Mon 3/22/21	Wed 9/29/21	
2	Chilled Water Tie-in at Heating Plant	5 days	Mon 3/22/21	Fri 3/26/21	
3	Tie-in at Existing Steam Pit	5 days	Mon 5/17/21	Fri 5/21/21	
4	Pine Street/East Ave Closure	90 days	Mon 4/12/21	Fri 8/13/21	
5	Electrical Ductbank & Steam Pits	88 days	Mon 3/29/21	Wed 7/28/21	
6	MH S104&P104	5 days	Mon 3/29/21	Fri 4/2/21	
7	Phase (1) Thru MH S&P103 -- FH3	16 days	Mon 4/12/21	Mon 5/3/21	
8	Excavation & Water Main Tie-in & 15 days	15 days	Mon 4/12/21	Fri 4/16/21	
9	Excavation for Electrical Duct Bank 1 day	1 day	Mon 4/19/21	Mon 4/19/21	
10	Pre-Cast Manhole Install	1 day	Tue 4/20/21	Tue 4/20/21	
11	Electrical Conduit Install	5 days	Wed 4/21/21	Tue 4/27/21	
12	Concrete Encasement	2 days	Wed 4/28/21	Thu 4/29/21	
13	Backfill	2 days	Fri 4/30/21	Mon 5/3/21	
14	Phase (2) Thru MH S&P102 -- FH2	17 days	Mon 5/3/21	Tue 5/25/21	
15	Excavation for Electrical Duct Bank 2 days	2 days	Mon 5/3/21	Tue 5/4/21	
16	Pre-Cast Manhole Install	1 day	Wed 5/5/21	Wed 5/5/21	
17	Electrical Conduit Install	10 days	Thu 5/6/21	Wed 5/19/21	
18	Concrete Encasement	2 days	Thu 5/20/21	Fri 5/21/21	
19	Backfill	2 days	Mon 5/24/21	Tue 5/25/21	
20	Phase (3) Thru MH S&P101 -- FH1	23 days	Tue 5/25/21	Thu 6/24/21	
21	Excavation for Electrical Duct Bank 2 days	2 days	Tue 5/25/21	Wed 5/26/21	
22	Pre-Cast Manhole Install	2 days	Thu 5/27/21	Fri 5/28/21	
23	Electrical Conduit Install	15 days	Mon 5/31/21	Fri 6/18/21	
24	Concrete Encasement	2 days	Mon 6/21/21	Tue 6/22/21	
25	Backfill	2 days	Wed 6/23/21	Thu 6/24/21	
26	Phase (4) Thru MH S&P100	23 days	Mon 6/28/21	Wed 7/28/21	
27	Excavation for Electrical Duct Bank 2 days	2 days	Mon 6/28/21	Tue 6/29/21	

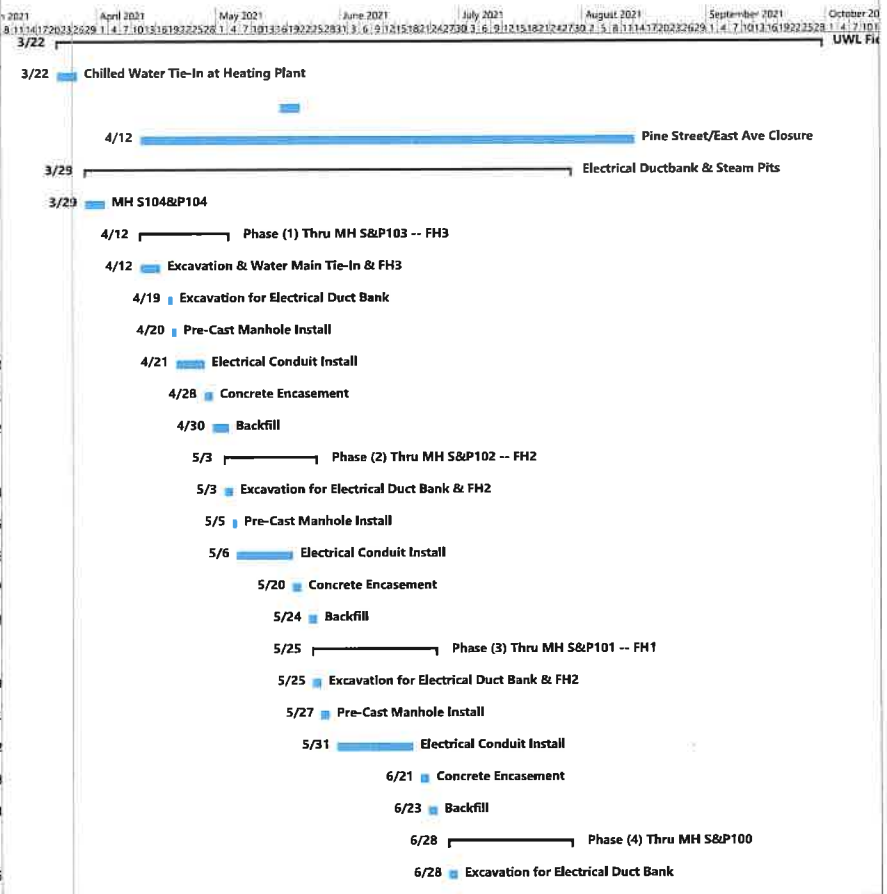


Project: UWL Fieldhouse Site U
Date: Fri 3/26/21


Task	Project Summary	Manual Task	Start-only	Deadline
Split	Inactive Task	Duration-only	Finish-only	Progress
Milestone	Inactive Milestone	Manual Summary Rollup	External Tasks	Manual Progress
Summary	Inactive Summary	Manual Summary	External Milestone	

Page 1

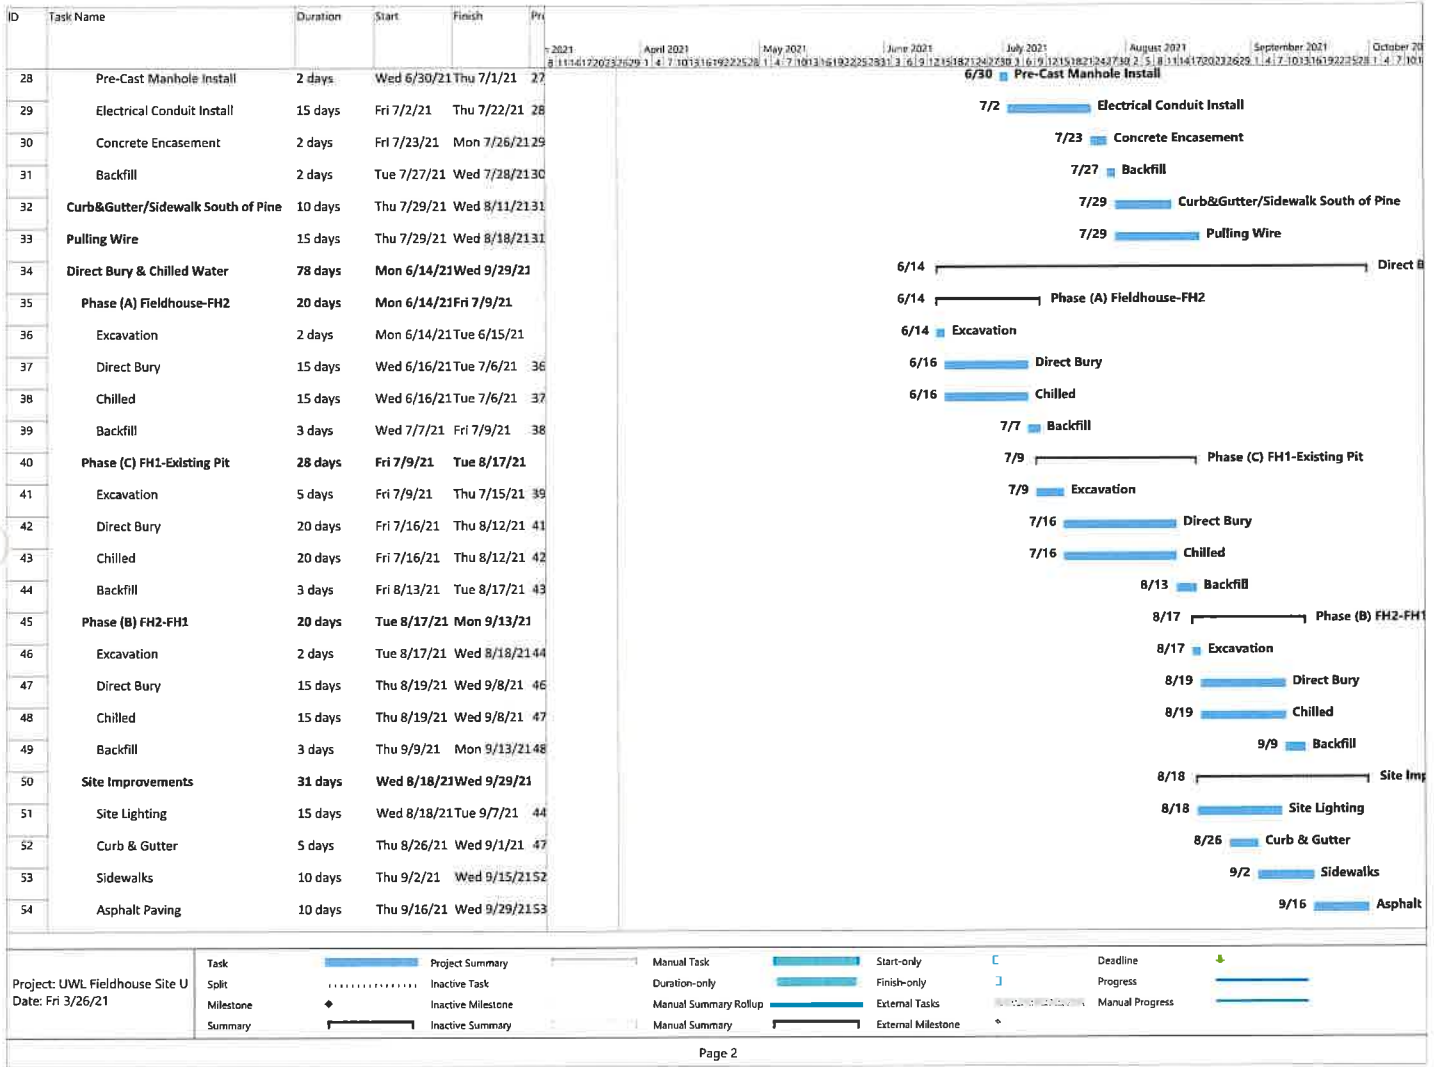

LAST AVENUE NORTH

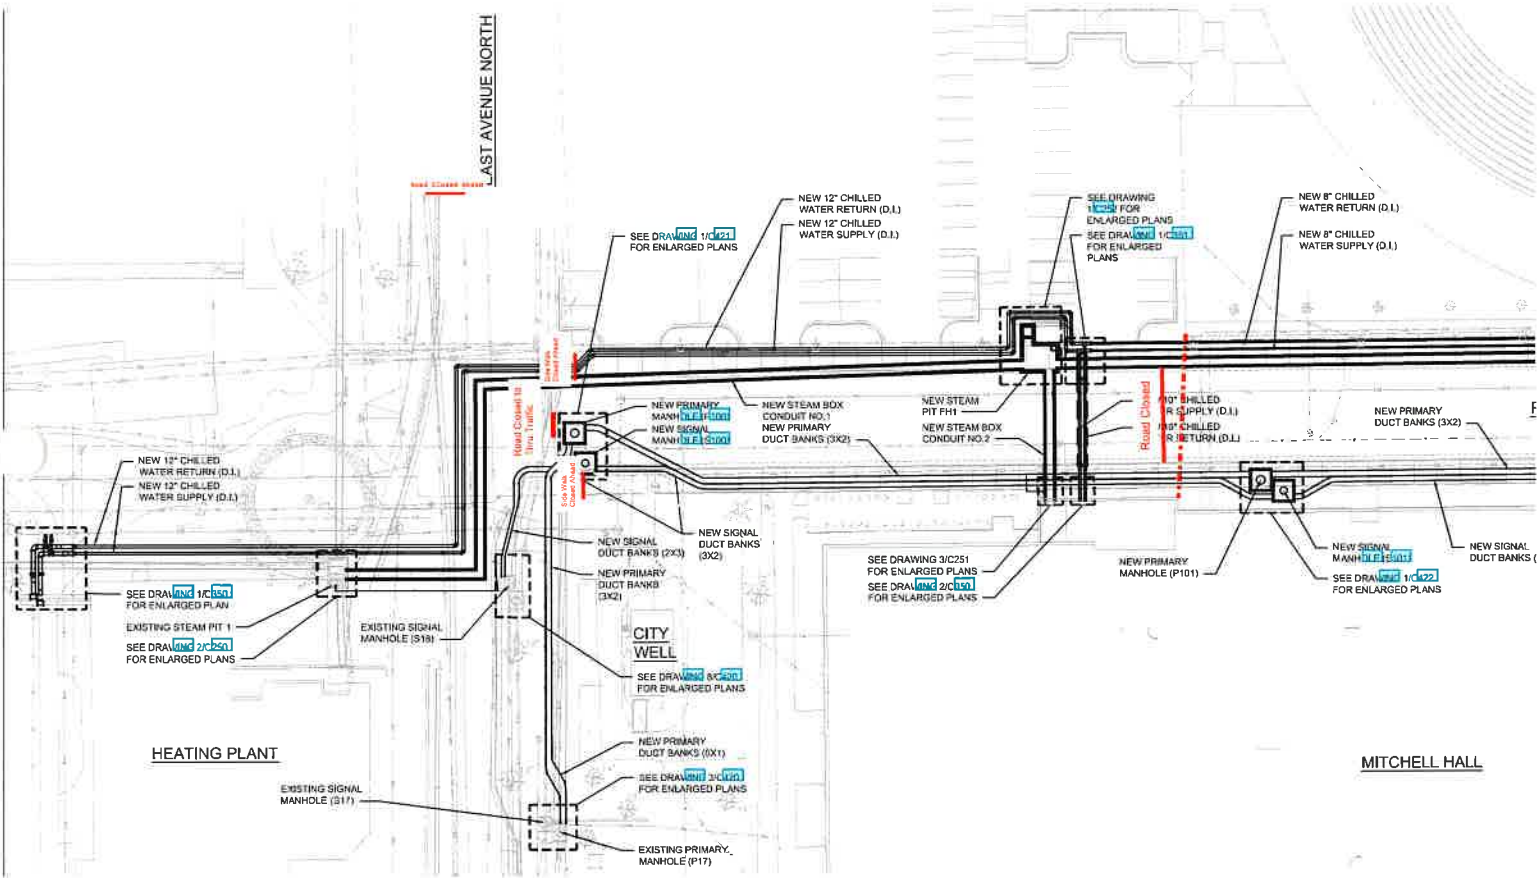

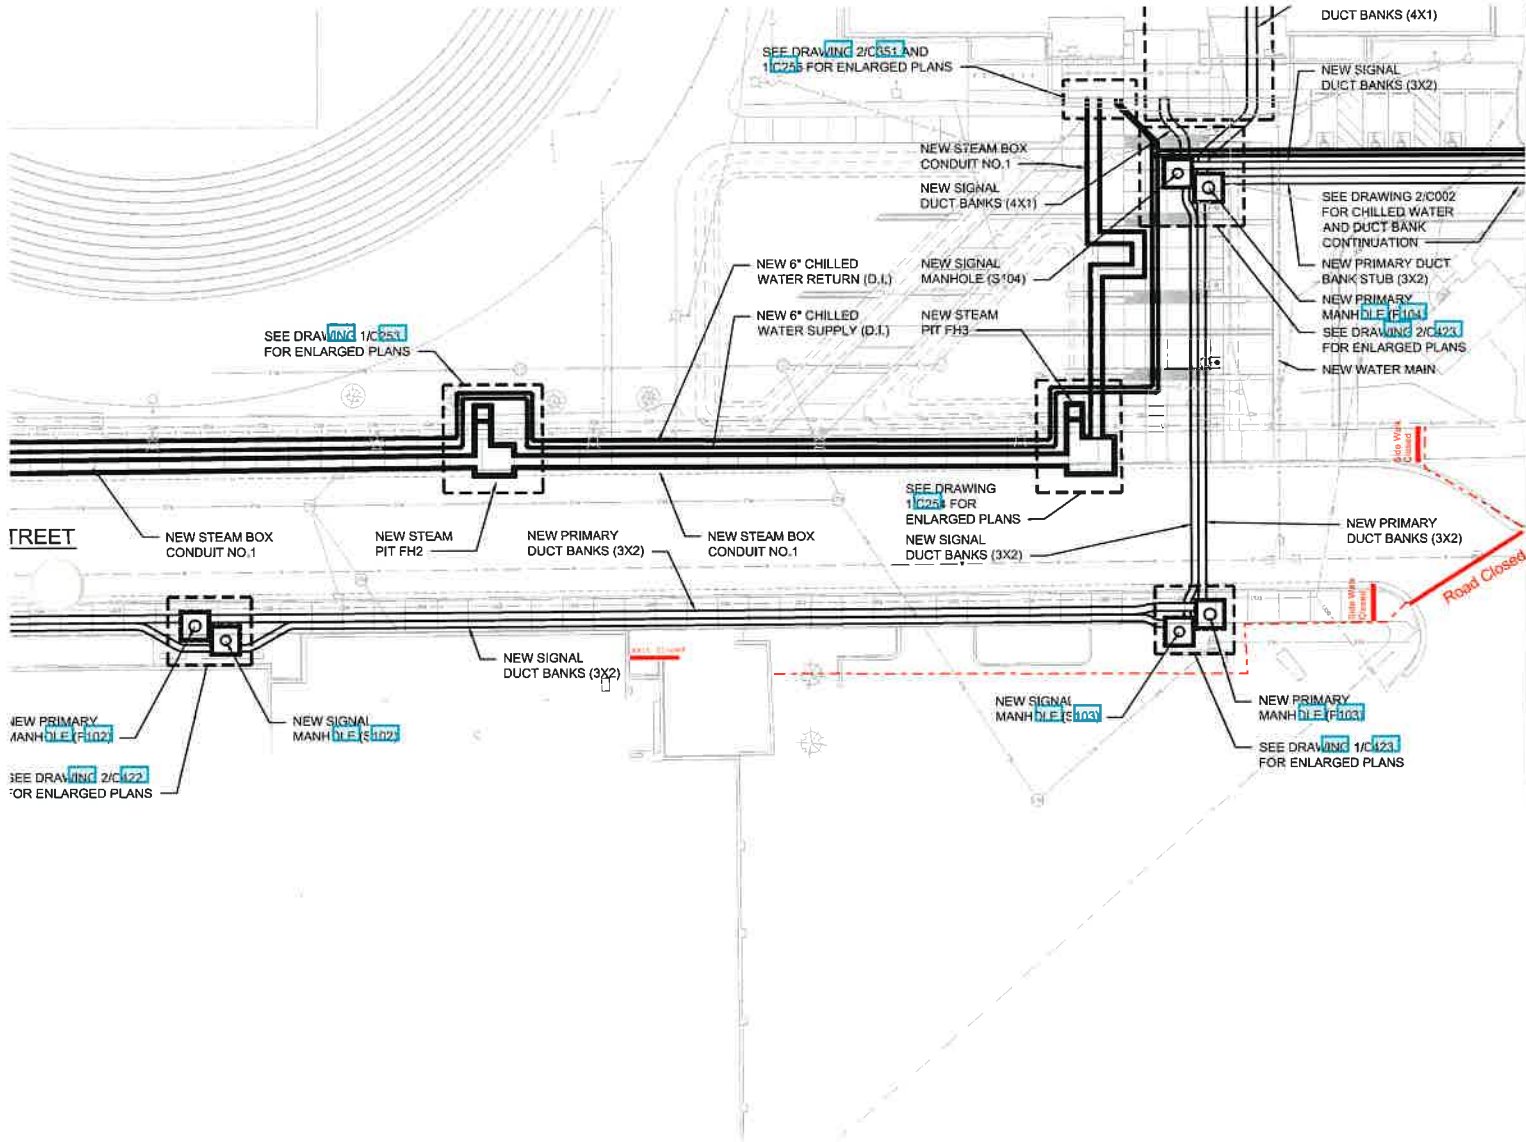

TREET

ELDHOUSE AND SOCCER

Road Closure Start: 6/28
Road Closure End: 9/13

