BRIGHTSPEED LA CROSSE


LCRSWIXA 2845 HARVEY ST, LA CROSSE, WI 54603, USA CONDUIT LAYOUT

Sheet List Table					
Sheet Number	Sheet Title				
01	COVER SHEET				
02	GENERAL NOTES				
03	LEGENDS				
04	TYPICAL				
05	FIBER LAYOUT				

Material List Table					
ITEM	QUANTITY				
FEEDER FIBER	00				
JUMPER	00				
17"X30"X18" HH	03				
12"X24"X18" HH	00				
24"X36"X24" HH	00				
2" CONDUIT	898'				
NEW STRAND	00				
ANCHOR	00				

BLM INFO						
SECTION	S17					
MUNICIPALITY	LA CROSSE					
TOWNSHIP	T16N					
COUNTY	LA CROSSE					
RANGE	R7W					

REVISION	DATE	DESCRIPTION	•
			•

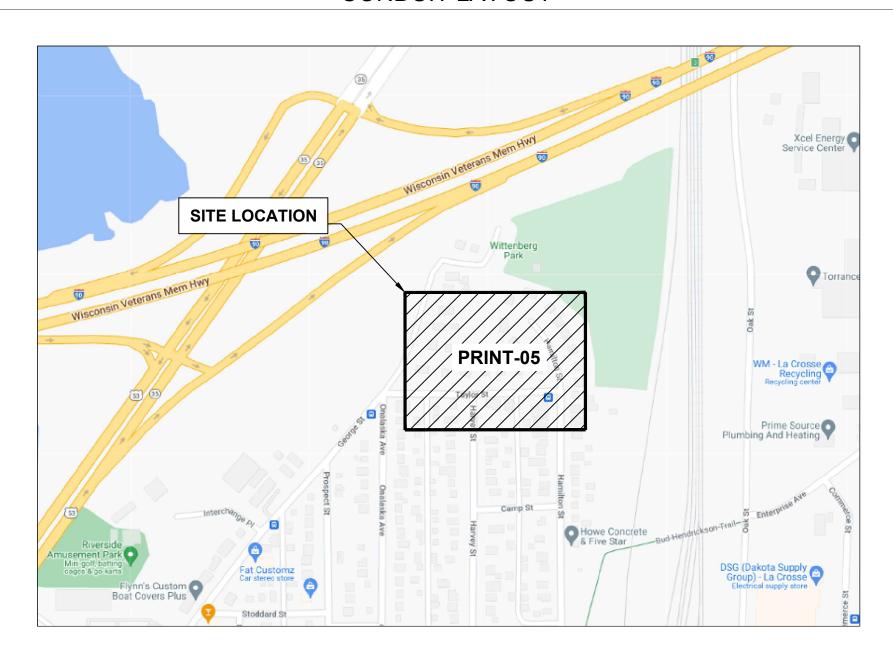


GENERAL ABBREVIATIONS

R/W	RIGHT OF WAY
S/W	SIDEWALK
C/L	CENTER LINE
CSW	CONCRETE SIDEWALK
DWY	DRIVEWAY
FOC	FACE OF CURB
BOC	BACK OF CURB
EOC	EDGE OF CURB
EOP	EDGE OF PAVEMENT
ETW	ETW LINE
HH	HANDHOLE
MH	MANHOLE
N.T.S.	NOT TO SCALE
CONC	CONCRETE
PED	PEDESTAL (UTILITY)
PVC	POLYVINYL CHLORIDE
P/L	PROPERTY LINE
RR	RAILROAD
SL	STREET LIGHT
W-BLDG	WALL TO BUILDING
W-P	WALL TO POLE
W-W	WALL TO WALL
U/E	UTILITY EASEMENT
SD	STORM DRAIN
TS	TRAFFIC SIGNAL

PERMITTING AGENCY CITY OF LA CROSSE

LINEAR PATH FOOTAGE UNDERGROUND PATH - 898 FT







🔆 brightspeed

LCRSWIXA

COVER SHEET



GENERAL NOTES



PLAN SHEET DISCLAIMER:

- 1. EVERY REASONABLE EFFORT HAS BEEN MADE TO ASSURE THE ACCURACY OF THESE PLANS AND ASSOCIATED DATA.
- 2. IN AN EFFORT TO INCREASE THE CLARITY AND LEGIBILITY OF THE PLANS, EXISTING UNDERGROUND UTILITIES WILL NOT BE SHOWN UNLESS THERE IS PROPOSED WORK THAT WILL REQUIRE EXCAVATION OR ANY OTHER EARTH DISTURBING ACTIVITY. IF PROPOSED WORK WILL REQUIRE THIS TYPE OF ACTIVITY. EXISTING UNDERGROUND UTILITIES WILL BE PROPERLY INVESTIGATED AND REPRESENTED ON THE PLAN SHEET OF THE RESPECTIVE WORK LOCATION

UTILITIES

- 1. THE IDENTITY AND LOCATION OF EXISTING UNDERGROUND UTILITIES LOCATED IN AND AROUND THE CONSTRUCTION AREA HAVE BEEN SHOWN AND LABELED ON THE PLANS BY USING INFORMATION PROVIDED BY THE RESPECTIVE UTILITY OWNERS.
- 2. SUPPORT AND PROTECTION OF ALL UTILITIES AND APPURTENANCES SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. COSTS FOR THE REPAIR AND RESTORATION OF EXISTING UTILITIES DAMAGED BY THE CONTRACTOR SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.
- 3. CALL 811 BEFORE YOU DIG. AT LEAST 48 HOURS PRIOR TO EXCAVATION.

WORK LIMITS

1. THE WORK LIMITS SHOWN ON THESE PLANS ARE FOR PHYSICAL CONSTRUCTION ONLY. THE INSTALLATION AND OPERATION OF ALL TEMPORARY TRAFFIC CONTROL AND TEMPORARY TRAFFIC CONTROL DEVICES REQUIRED BY THESE PLANS SHALL BE PROVIDED BY THE CONTRACTOR WHETHER INSIDE OR OUTSIDE OF THESE WORK LIMITS.

MAINTAIN DRAINAGE

1. THE CONTRACTOR AT HIS OWN EXPENSE, SHALL MAINTAIN THE FLOW IN ALL SEWERS, DRAINS, FIELD TILES, AND WATERCOURSES ENCOUNTERED IN AND AROUND THE PROJECT SITE. IF SUCH WATERCOURSES OR DRAINS ARE DISTURBED OR DESTROYED DURING THE EXECUTION OF THE PROJECT. THEY SHALL BE RESTORED BY THE CONTRACTOR AT HIS OWN EXPENSE TO A CONDITION SATISFACTORY TO THE ENGINEER.

SECURING EXCAVATIONS & TRENCHES FOR NON-WORKING HOURS

EXCAVATIONS AND TRENCHES OVER 24-INCHES DEEP SHALL BE SECURELY PLATED OR BACKFILLED DURING NON-WORKING HOURS.

EXCAVATION OF ROADWAY AND RIGHT-OF-WAY AREAS

- 1. ANY CONTRACTOR PERFORMING EXCAVATION, INCLUDING BUT NOT LIMITED TO DISTURBING THE EARTH WTH POWERED OR NON-POWERED EQUIPMENT, DRILLING AND/OR BORING, SHALL CAUSE NOTICE TO BE GIVEN BY CALLING 811 AT LEAST 48 HOURS BUT NOT MORE THAN 10 WORKING DAYS BEFORE EXCAVATING.
- 2. THE EXCAVATOR SHALL PROTECT AND PRESERVE THE MARKINGS UNTIL THOSE MARKINGS ARE NO LONGER NEEDED. IF AN EXCAVATION WILL COVER A LARGE AREA AND/OR PROGRESS FROM ONE AREA TO THE NEXT OVER A PERIOD OF TIME. THE EXCAVATOR SHALL COORDINATE THE MARKING OF APPROXIMATE LOCATIONS OF CITY OWNED FACILITIES WITH THE ACTUAL EXCAVATION.
- 3. THE CONTRACTOR IS RESPONSIBLE FOR LOCATING ALL CUSTOMER OWNED SERVICE LINES/LATERALS. THE CONTRACTOR SHALL FIELD VERIFY THE HORIZONTAL AND VERTICAL LOCATION OF ANY CITY OR CUSTOMER OWNED MAIN OR SERVICE LINE/LATERALS THAT MAY BE AFFECTED BY THE PROPOSED CONSTRUCTION ACTIVITIES. FIELD VERIFICATION SHALL TAKE PLACE PRIOR TO ANY ACTIVITY THAT MAY JEOPARDIZE THE INTEGRITY OF THE FACILITY AND AT A LOCATION NEAREST THE POINT OF POSSIBLE CONFLICT.
- 4. ANY DAMAGES TO CITY OR CUSTOMER OWNED FACILITIES SHOULD FIRST BE REPORTED TO THE UTILITY OWNER THEN IMMEDIATELY NOTIFY THE PROJECT ENGINEER.

AERIAL CONSTRUCTION:

- 1. CONTRACTOR TO VERIFY ALL BONDING AND GROUNDING COMPLES WITH NESC GUIDELINES.
- 2. CONSTRUCTION TO VERIFY ALL REQUIRED MAKE READY WORK IS COMPLETE BEFORE PLACING ON UTILITY POLES.

SAFETY NOTE:

- 1. CHECK IN WITH CONSTRUCTION SUPERVISOR WHEN ARRIVING ON-SITE.
- 2. HEAVY CONSTRUCTION EQUIPMENT IN USE. BEWARE OF SURROUNDINGS.
- 3. FOLLOW CONGRUEX SAFETY POLICIES AND GUIDELINES AT ALL TIMES WHILE WORKING.
- CONSTRUCTION ZONE/ HARD HAT, SAFETY GLASSES, REFLECTIVE VEST/SHIRT, SAFETY TOE BOOTS REQUIRED WORK SAFELY



LEGENDS SHEET



		EXIST	ING EQUIPMENTS LEGEN	NDS				
	R/W		CABINET	PWR	ELECTRIC TRANSFORMER	G	GAS METER	CULVERT
	CENTER LINE		EXISTING PED	E	ELECTRIC METER	GV	GAS VALVE	C/L MONUMENT
	EOP BOC	FP	EXISTING FLOWERPOT		ELECTRIC VAULT/HANDHOLE	S	SEWER MANHOLE	> ANCHOR & DOW
	PROPERTY LINE FENCE	HH	EXISTING HANDHOLE	Œ	ELECTRIC MANHOLE	(MH)	UNKNOWN MANHOLE	
т	TELCO		TELEPHONE CABINET	\vee	EXISTING VAULT	W	WATER METER	
— Е — — — — — — — — — — — — — — — — — —			TELEPHONE MANHOLE		STREETLIGHT	₩v ⊠	WATER VALVE	
	TRAFFIC SIGNAL			Υ	POWER PED	$\langle H \rangle$	FIRE HYDRANT	
	WATER		POLE	P		WHH)	WATER MANHOLE	
	SEWER STORM DRAIN	•	CABLE MARKER		CATV PED			
	UTILITY EASEMENT		STREET SIGN	TV	CATV VAULT/HANDHOLE		STORM DRAIN CATCH BASIN	
		1/1/2	VERTICAL GROUND	S	TREE	SD	STORM DRAIN MANHOLE	
	SIDEWALK	E	ELECTRIC PEDESTAL/CABINET		TRANSFORMER			
		PROP	OSED EQUIPMENTS LEG	END	S			
BORE BORE	BORE		12"X24"X18" HANDHOLE					
	TRENCH							
	AERIAL FIBER		24"X36"X24" HANDHOLE					
			36"X48"X30" HANDHOLE					
		—	✓ ANCHOR & DOWN GUY					
		- ·						




TYPICALS SHEET

PLAN VIEW

EX. POLE




MINIMUM STANDARDS FOR DIRECTIONAL BORING STREET CROSSINGS

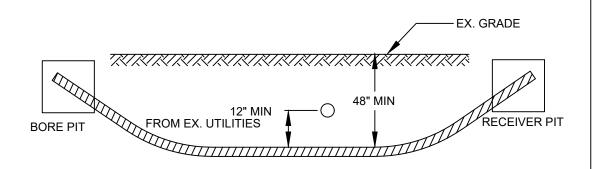


- PLACE END MARKER WITH UTILITY OWNER'S NAME DESCRIBING CONDUIT
- BORE PIT TO BE BACKFILLED AND COMPACTED IN 12" LIFTS WITH MATERIAL REMOVED
- FLOW OF DITCH MUST BE MAINTAINED AT ALL TIMES
- PROTECT ROOTS AT ALL TREE LOCATIONS, SHIFT BORE TRENCH IF NECESSARY

TYPICAL BORE DETAILS 1


MINIMUM STANDARDS FOR DIRECTIONAL BORING UNDER SIDEWALKS & WITHIN ROW (EXCLUDING STREET CROSSINGS)

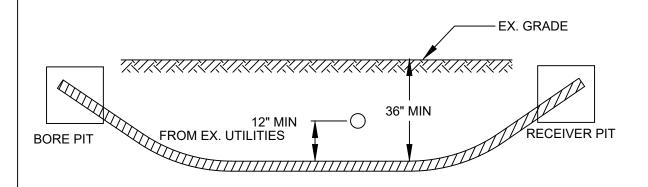


- PLACE END MARKER WITH UTILITY OWNER'S NAME DESCRIBING CONDUIT
- BORE PIT TO BE BACKFILLED AND COMPACTED IN 12" LIFTS WITH MATERIAL REMOVED
- FLOW OF DITCH MUST BE MAINTAINED AT ALL TIMES
- PROTECT ROOTS AT ALL TREE LOCATIONS, SHIFT BORE TRENCH IF NECESSARY




ELEVATION

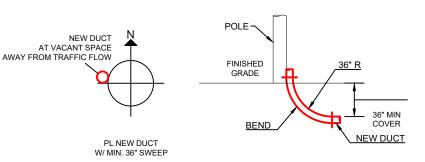




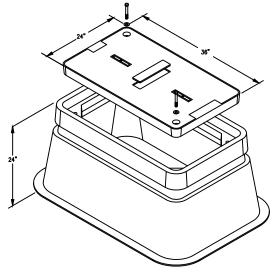



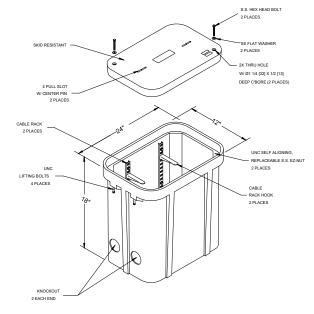

12"x24"x18"

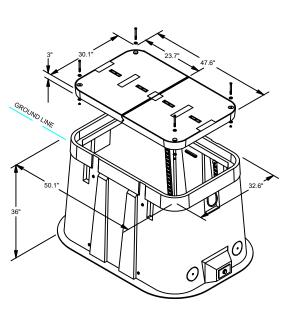

30"x48"x36"

17"x30"x18"

