




1 ENLARGED PAVING PLAN
1/8" = 1'-0"

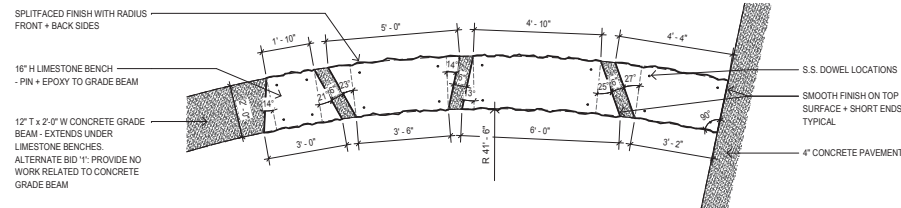


2 LIMESTONE BENCH GROUP A
3/8" = 1'-0"

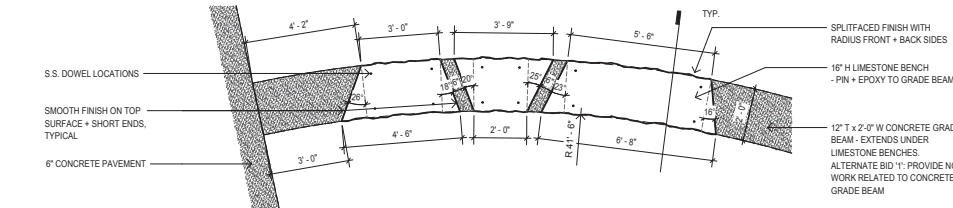


3 LIMESTONE BENCH GROUP B
3/8" = 1'-0"

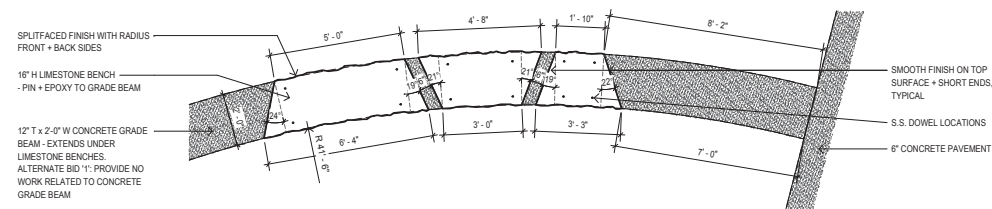


4 LIMESTONE BENCH GROUP C
3/8" = 1'-0"

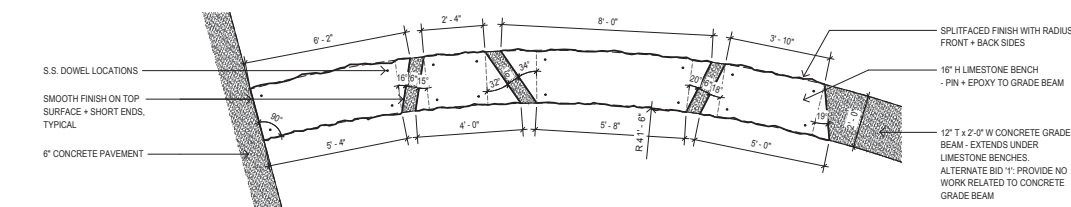


5 LIMESTONE BENCH GROUP D
3/8" = 1'-0"

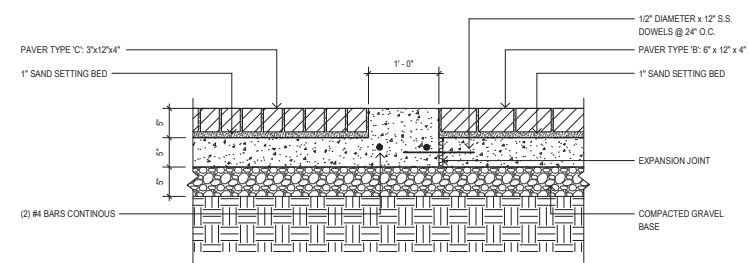

6 PAVER TO CONCRETE CURB DETAIL
1" = 1'-0"

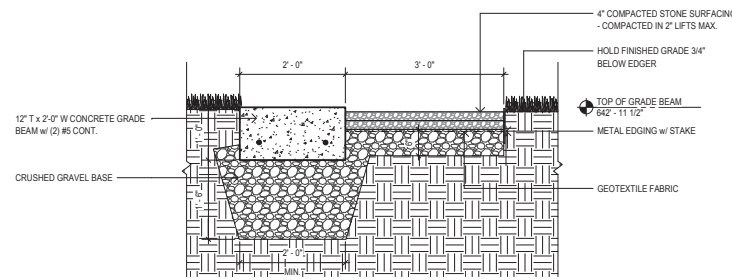

7 CONCRETE RING DETAIL
3/4" = 1'-0"

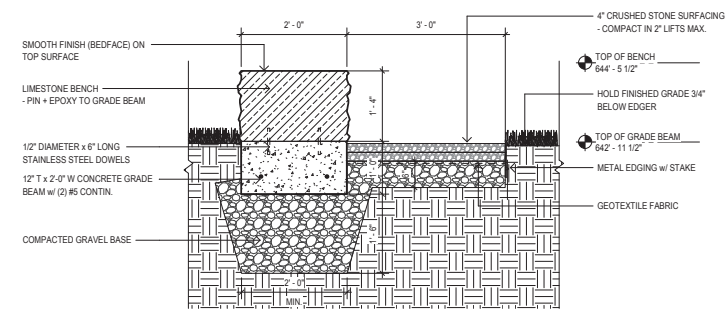

8 LIMESTONE BENCH SECTION
3/4" = 1'-0"

- GENERAL NOTES:**
1. FIELD VERIFY EXISTING CONDITIONS PRIOR TO SUBMITTING BID AND NOTIFY ARCHITECT OF DISCREPANCIES.
 2. PRIOR TO ANY EARTHWORK ACTIVITY, ALL EROSION CONTROL MEASURES SHALL BE INSTALLED, AND APPROPRIATE PERMITS SHALL BE OBTAINED.
 3. THE LOCATION OF EXISTING UTILITIES, BOTH UNDERGROUND AND OVERHEAD, ARE APPROXIMATE AND HAVE NOT BEEN INDEPENDENTLY VERIFIED BY THE OWNER OR ITS REPRESENTATIVES. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING THE EXACT LOCATION OF ALL EXISTING UTILITIES, WHETHER SHOWN ON THESE PLANS OR NOT, BEFORE COMMENCING WORK AND SHALL BE FULLY RESPONSIBLE FOR ANY AND ALL DAMAGES WHICH MIGHT BE CAUSED BY THE CONTRACTOR'S FAILURE TO EXACTLY LOCATE AND PRESERVE ANY AND ALL UTILITIES.
 4. THE UNDERGROUND LOCATIONS OF THE PUBLIC UTILITIES WERE MARKED BY REPRESENTATIVES OF THOSE COMPANIES. THE LOCATIONS OF THE PRIVATELY OWNED UNDERGROUND UTILITIES WERE NOT MARKED.
 5. THERE MAY BE MORE UNDERGROUND UTILITY INSTALLATIONS WITHIN THE PROJECT AREA THAT ARE NOT SHOWN.
 6. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO ARRANGE FOR ANY NECESSARY INSPECTIONS BY LOCAL GOVERNMENT THAT MAY BE REQUIRED.
 7. ANY AND ALL PARTIES UTILIZING VERTICAL DATUM SHALL ALWAYS CHECK INTO AT LEAST (2) BENCHMARKS TO AVOID MISTAKES DUE TO HYDRANT ADJUSTMENTS OR TRANSITIONAL ERRORS.

- SHEET KEYNOTES:**
1. PAVER TYPE 'C': 3" x 12" x 4" CONCRETE PAVERS OVER 6" CONCRETE SLAB, RUNNING BOND JOINT PATTERN
 2. 4" CONCRETE PAVEMENT - SEE DETAIL 1C500
 3. 5" CONCRETE PAVEMENT - SEE DETAIL 6C500
 4. PAVER TO CONCRETE PAVEMENT TRANSITION - SEE DETAIL 3C500
 5. PAVER TYPE 'C': 3" x 12" CONCRETE PAVERS OVER SLAB-ON-GRADE, RADIAL JOINT PATTERN
 6. 12" THICK x 2'-0" WIDE CONCRETE GRADE BEAM, EXTENDS UNDER LIMESTONE BENCHES. ALTERNATE BID '1': PROVIDE NO WORK RELATED TO CONCRETE GRADE BEAM
 7. PLANTING BED, PROVIDE 6" MINIMUM TOPSOIL. ALTERNATE BID '2': PROVIDE NO WORK RELATED TO LANDSCAPE PLANTS AND PLANTING. ALTERNATE DOES NOT AFFECT PLANTING SOIL.
 8. UNDERGROUND DRYWELL COVER, COORDINATE LOCATION WITH PLUMBING DRAWINGS
 9. METAL EDGING
 10. STAINLESS STEEL PAVER EDGING
 11. CRUSHED STONE WALK, PROVIDE STEEL EDGING AT ALL SIDES NOT BORDERED BY PAVING. ALTERNATE BID '1': PROVIDE NO WORK RELATED TO CRUSHED STONE SURFACING
 12. 6" CONCRETE PAVING - SEE DETAIL 2C500
 13. SEE SHEET A100 FOR BANDSTAND STAGE FLOOR PLAN
 14. EXISTING TREE TO REMAIN, PROTECT DURING CONSTRUCTION
 15. INTEGRAL CONCRETE CURB
 16. 16" H LIMESTONE BENCH, SEE SHEET C501. ALTERNATE BID '1': PROVIDE NO WORK RELATED TO LIMESTONE BENCHES

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly registered professional under the laws of the State of Wisconsin. WISCONSIN
 DATE: _____
 DRAWN BY: _____
 CHECKED BY: _____


REVISION	NO.	DATE	DESCRIPTION

PROJECT: RIVERSIDE PARK BANDSTAND RENOVATION
 CITY OF LA CROSSE, WI
 DATE: JULY 12, 2018
 DRAWN BY: BA
 CHECKED BY: MWS
 PROJECT No: 1325B
 DRAWING TITLE: DETAILS
 SHEET NUMBER: C501


C501

- GENERAL NOTES:**
1. FIELD VERIFY EXISTING CONDITIONS PRIOR TO SUBMITTING BID AND NOTIFY ARCHITECT OF DISCREPANCIES.
 2. ALL SITE IMPROVEMENTS LISTED FOR DEMOLITION SHALL BE REUSED OR REMOVED COMPLETELY AND DISPOSED OF AS SPECIFIED OR AS INDICATED ON THE DRAWINGS.
 3. CONTRACTOR SHALL REMOVE ALL DEBRIS FROM THE SITE GENERATED BY THE WORK AND DISPOSE OF IN A LEGAL MANNER.
 4. DIMENSIONS ARE TAKEN FROM FACE OF FRAMING UNLESS NOTED OTHERWISE.
 5. ALL FLOOR PLANS ARE PROVIDED FOR REFERENCE ONLY. LOCATIONS OF WALLS, DOORS, WINDOWS, FIXTURES, ETC. ARE APPROXIMATE AND SHALL BE VERIFIED BY THE DEMOLITION CONTRACTOR. NOTIFY ARCHITECT OF DISCREPANCIES OR PERCEIVED DIFFERENCES.
 6. REFER TO MECHANICAL/ELECTRICAL/PLUMBING FOR DEMOLITION OF PIPING, EQUIPMENT, FIXTURES, ETC.
 7. OWNER WILL REMOVE ALL ITEMS OF VALUE FROM THE BUILDING PRIOR TO THE START OF DEMOLITION.
 8. EXERCISE EXTREME CARE DURING DEMOLITION SO AS TO NOT DAMAGE CONSTRUCTION AND OTHER STRUCTURES THAT ARE INTENDED TO REMAIN. ANYTHING DAMAGED AT THE TIME OF WORK IS TO BE REPLACED AND/OR REPAIRED TO MATCH EXISTING CONSTRUCTION AT CONTRACTOR'S EXPENSE.
 9. ADDITIONAL DEMOLITION NOTES ARE INCLUDED THROUGHOUT THE DRAWINGS FOR COMPLETE SCOPE OF WORK TO BE INCLUDED.

- SHEET KEYNOTES:**
- 1 DEMOLISH AND REMOVE CMU WALLS, PYLONS, AND FOUNDATIONS OF 1986 STAGE ADDITION COMPLETE.
 - 2 DEMOLISH AND REMOVE CONCRETE FOOTINGS OF 1986 STAGE ADDITION COMPLETE.
 - 3 DEMOLISH AND REMOVE CMU WALLS, PYLONS, AND FOUNDATIONS OF 1986 STAGE ADDITION COMPLETE.
 - 4 DEMOLISH AND REMOVE CONCRETE SLAB OF 1986 STAGE ADDITION COMPLETE. REMOVE FILL AS NECESSARY TO COMPLETE NEW WORK.
 - 5 REMOVE QUARRY TILE AND CONCRETE/STONE CURBS COMPLETE.
 - 6 DEMOLISH AND REMOVE CONCRETE STAIRCASE COMPLETE.
 - 7 REMOVE ALL WALL MOUNTED ELECTRICAL DEVICES/RECEPTACLES AND ASSOCIATED CONDUIT AND WIRING. SEE ELECTRICAL.
 - 8 REMOVE AND SALVAGE EXISTING WINDOWS AND FRAMES FOR REPAIR AND REINSTALLATION. REMOVE PROTECTIVE METAL GRATING.
 - 9 REMOVE EXISTING DOOR AND FRAME COMPLETE.
 - 10 DEMOLISH AND REMOVE UPPER PORTION OF ORIGINAL CONCRETE FOUNDATION WALL AND LIMESTONE STEPS AS REQUIRED FOR NEW WORK. ADD TEMPORARY BRACING/SHORING UNTIL NEW WORK CAN SUPPORT EXISTING STRUCTURE. VERIFY HEIGHTS WITH SECTIONS.
 - 11 SAW CUT AND REMOVE STRUCTURAL FLOOR SLAB OVER BASEMENT AS REQUIRED FOR NEW WORK. BRACE MASONRY WALLS UNTIL SLAB IS REPLACED AND CURED TO MIN. 75% OF DESIGN STRENGTH.
 - 12 REMOVE EXISTING ELECTRICAL PANEL AND ASSOCIATED CONDUIT. SEE ELECTRICAL.
 - 13 REMOVE AND SALVAGE EXISTING MONOLITHIC STONE BLOCKS.
 - 14 DEMOLISH AND REMOVE UPPER 24" OF EXISTING FOUNDATION WALL. EXTERIOR STEPS AND REMAINING WALL WILL BE BURIED IN PLACE.
 - 15 DEMOLISH AND REMOVE CONCRETE BEAM AND UPPER PORTION OF EXISTING CONCRETE COLUMNS AS REQUIRED FOR NEW WORK.
 - 16 CORE DRILL 6" DIAMETER HOLES IN EXISTING BASEMENT SLAB (TYPICAL 6 LOCATIONS) FOR DRAINAGE.

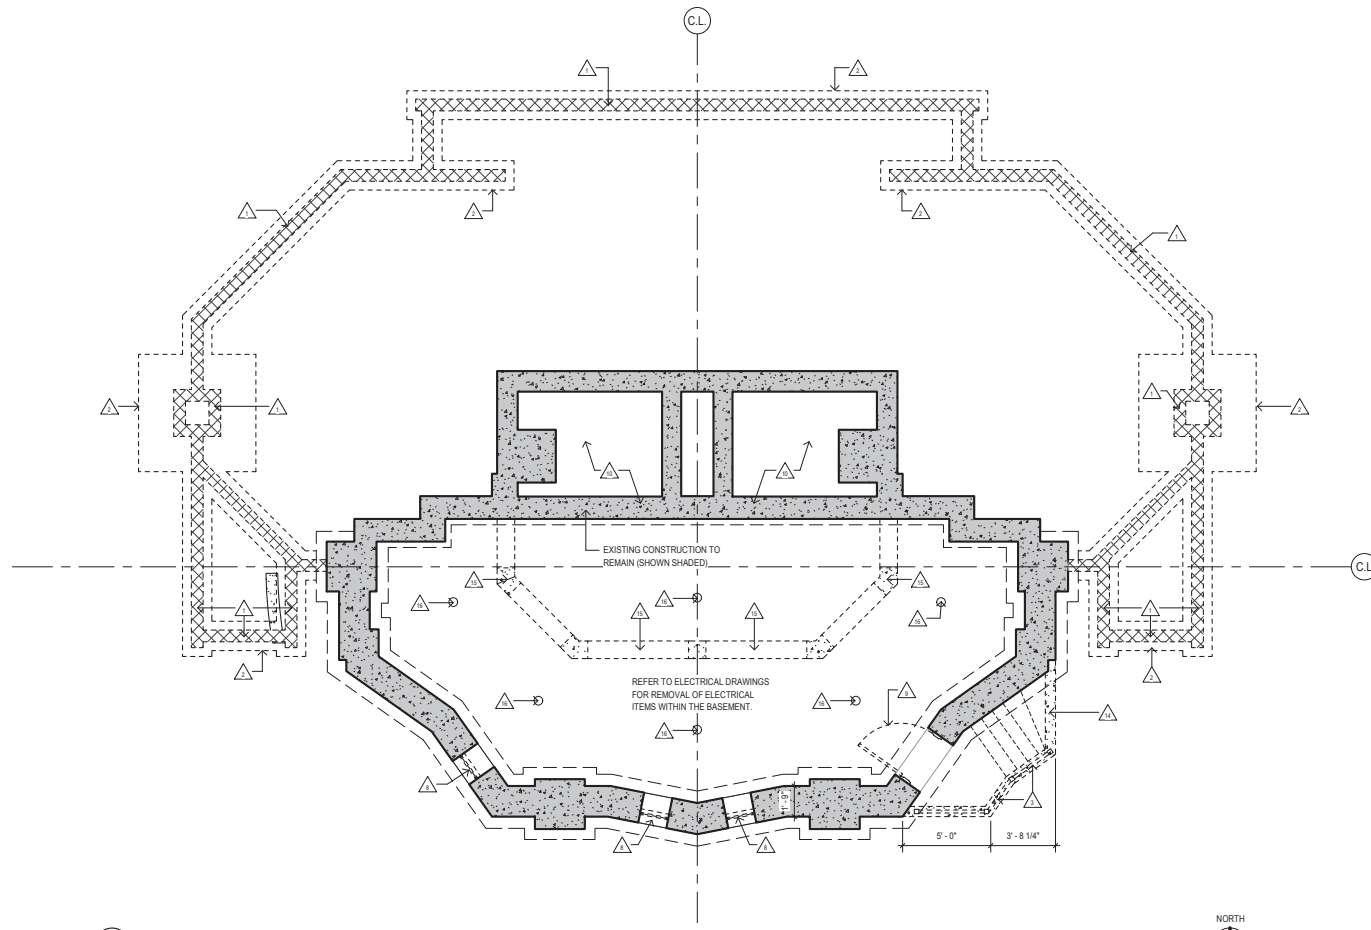

1 DEMO AT FOUNDATION PLAN
1/4" = 1'-0"

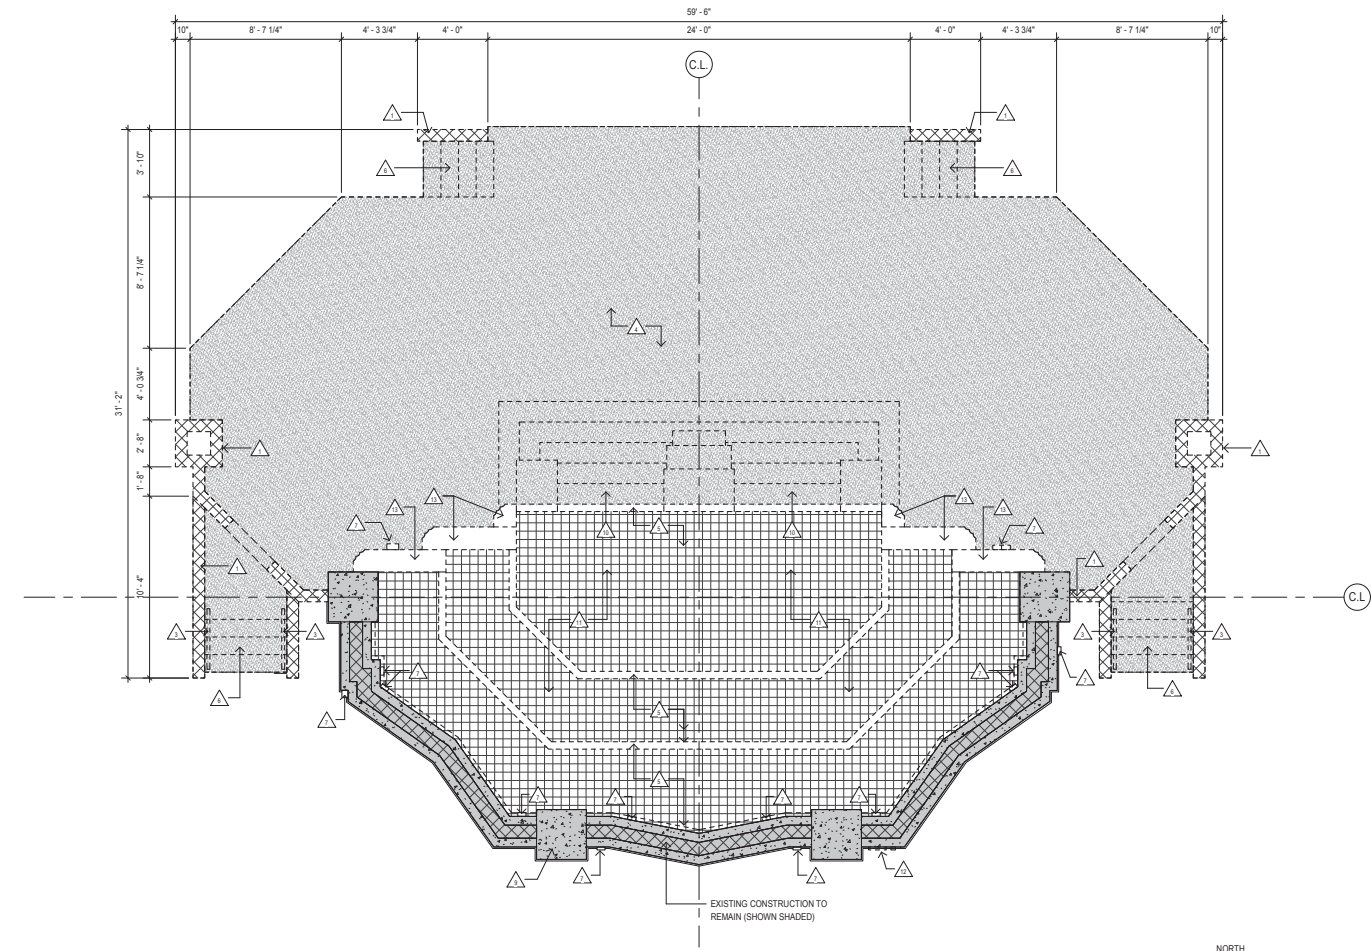

2 DEMO AT STAGE PLAN
1/4" = 1'-0"

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly registered professional under the laws of the State of Wisconsin.


DATE: _____
 TITLE: _____
 PROJECT NO.: _____
 DRAWING TITLE: _____

REVISION No.	Date	Description


PROJECT: RIVERSIDE PARK BANDSTAND RENOVATION
 CITY OF LA CROSSE, WI

DATE: JULY 12, 2018
 DRAWN BY: BA
 CHECKED BY: MWS


PROJECT No: 1325B
 DRAWING TITLE: DEMOLITION PLAN

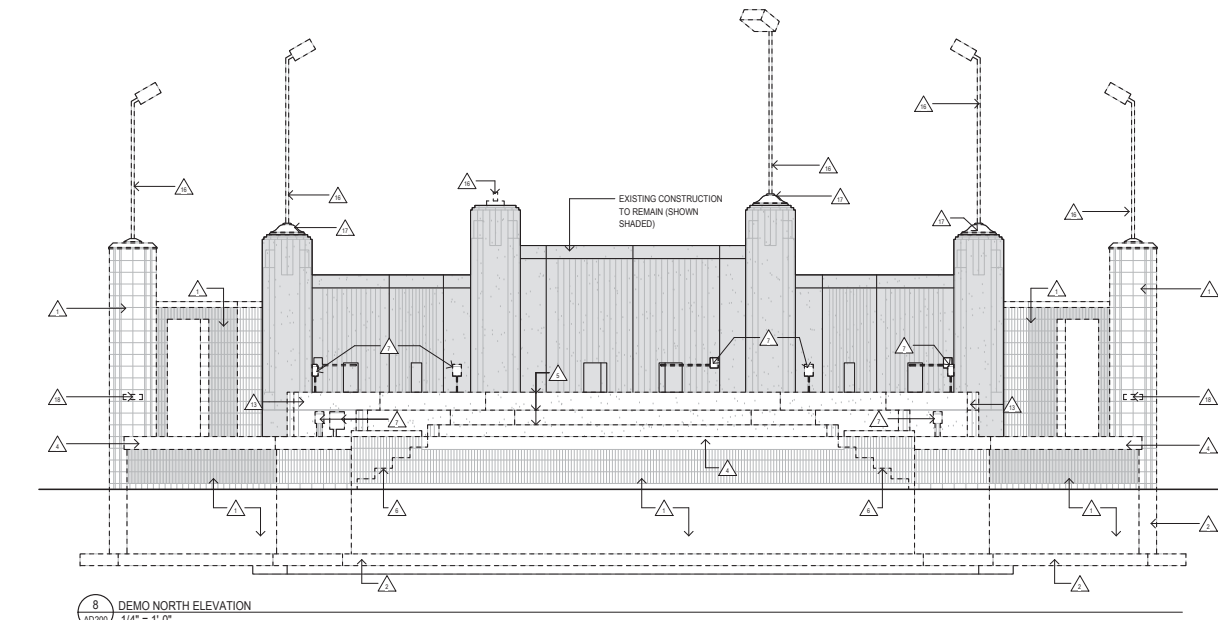


8 DEMO NORTH ELEVATION
AD200 1/4" = 1'-0"

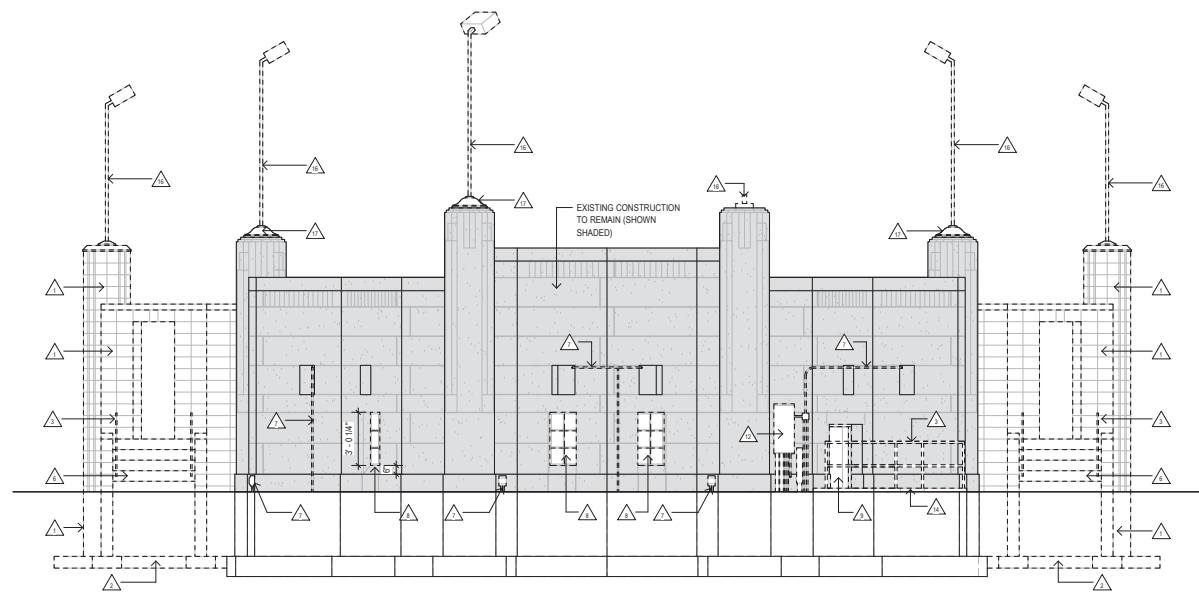


7 DEMO SOUTH ELEVATION
AD200 1/4" = 1'-0"

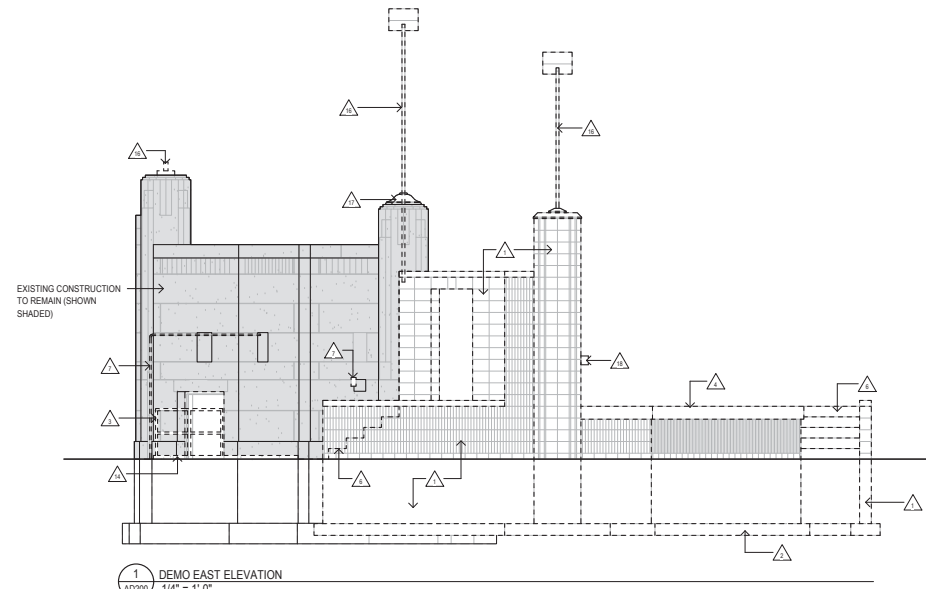

1 DEMO EAST ELEVATION
AD200 1/4" = 1'-0"

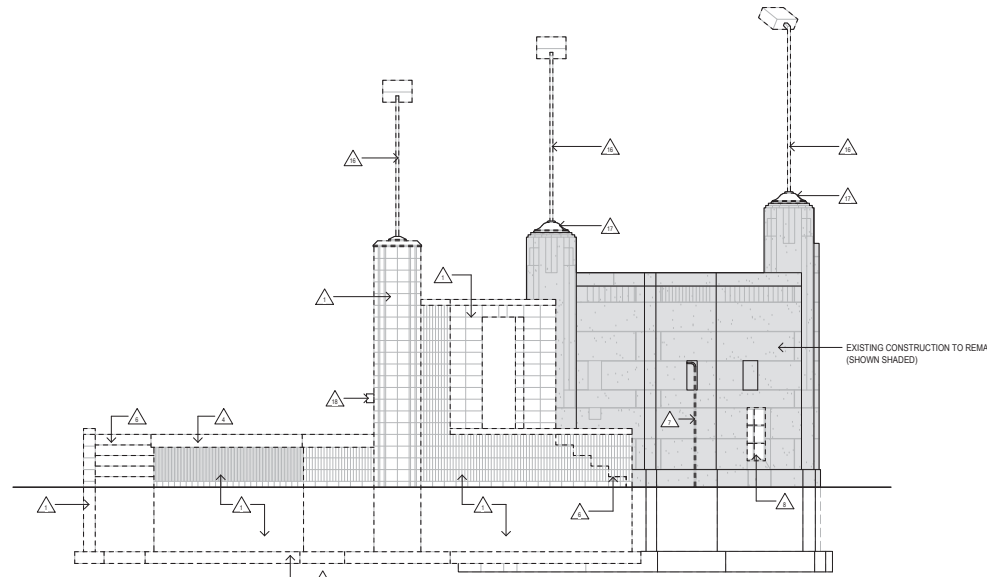

5 DEMO WEST ELEVATION
AD200 1/4" = 1'-0"

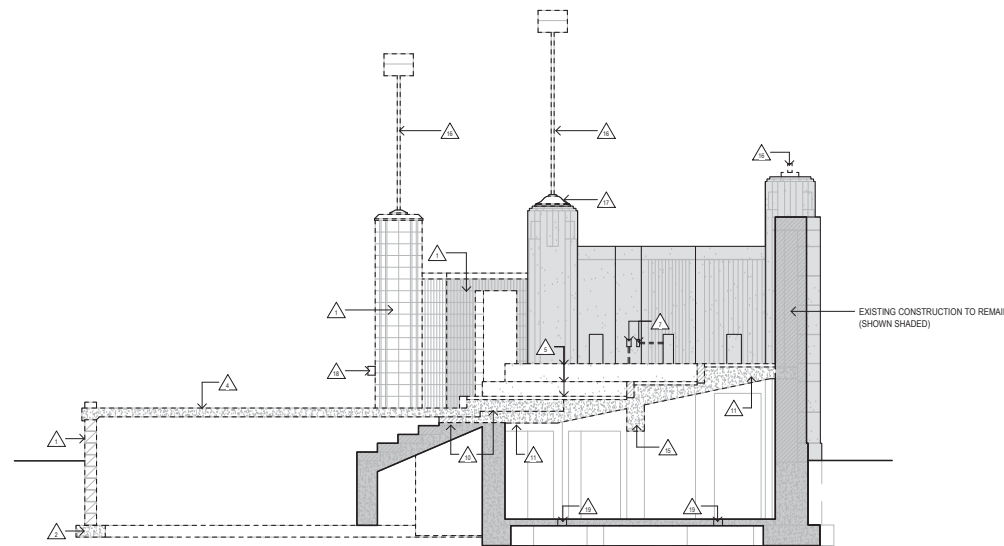

9 DEMO SECTION
AD200 1/4" = 1'-0"

- GENERAL NOTES:**
1. FIELD VERIFY EXISTING CONDITIONS PRIOR TO SUBMITTING BID AND NOTIFY ARCHITECT OF DISCREPANCIES.
 2. ALL SITE IMPROVEMENTS LISTED FOR DEMOLITION SHALL BE REUSED OR REMOVED COMPLETELY AND DISPOSED OF AS SPECIFIED OR AS INDICATED ON THE DRAWINGS.
 3. CONTRACTOR SHALL REMOVE ALL DEBRIS FROM THE SITE GENERATED BY THE WORK AND DISPOSE OF IN A LEGAL MANNER.
 4. DIMENSIONS ARE TAKEN FROM FACE OF FRAMING UNLESS NOTED OTHERWISE.
 5. ALL FLOOR PLANS ARE PROVIDED FOR REFERENCE ONLY. LOCATIONS OF WALLS, DOORS, WINDOWS, FIXTURES, ETC. ARE APPROXIMATE AND SHALL BE VERIFIED BY THE DEMOLITION CONTRACTOR. NOTIFY ARCHITECT OF DISCREPANCIES OR PERCEIVED DIFFERENCES.
 6. REFER TO MECHANICAL/ELECTRICAL PLUMBING FOR DEMOLITION OF PIPING, EQUIPMENT, FIXTURES, ETC.
 7. OWNER WILL REMOVE ALL ITEMS OF VALUE FROM THE BUILDING PRIOR TO THE START OF DEMOLITION.
 8. EXERCISE EXTREME CARE DURING DEMOLITION SO AS TO NOT DAMAGE CONSTRUCTION AND OTHER STRUCTURES THAT ARE INTENDED TO REMAIN. ANYTHING DAMAGED AT THE TIME OF WORK IS TO BE REPLACED AND/OR REPAIRED TO MATCH EXISTING CONSTRUCTION AT CONTRACTOR'S EXPENSE.
 9. ADDITIONAL DEMOLITION NOTES ARE INCLUDED THROUGHOUT THE DRAWINGS FOR COMPLETE SCOPE OF WORK TO BE INCLUDED.
 10. REMOVE ALL ABANDONED/UNUSED ANCHORS/FASTENERS IN EXISTING STONE PANELS.

- SHEET KEYNOTES:**
1. DEMOLISH AND REMOVE CMU WALLS, PYLONS, AND FOUNDATIONS OF 1986 STAGE ADDITION COMPLETE.
 2. DEMOLISH AND REMOVE CONCRETE FOOTINGS OF 1986 STAGE ADDITION COMPLETE.
 3. REMOVE METAL HANDRAILS.
 4. DEMOLISH AND REMOVE CONCRETE SLAB OF 1986 STAGE ADDITION COMPLETE. REMOVE FILL AS NECESSARY TO COMPLETE NEW WORK.
 5. REMOVE QUARRY TILE AND CONCRETE/STONE CURBS COMPLETE.
 6. DEMOLISH AND REMOVE CONCRETE STAIRCASE COMPLETE.
 7. REMOVE ALL WALL MOUNTED ELECTRICAL DEVICES/RECEPTACLES AND ASSOCIATED CONDUIT AND WIRING. SEE ELECTRICAL.
 8. REMOVE AND SALVAGE EXISTING WINDOWS AND FRAMES FOR REPAIR AND REINSTALLATION. REMOVE PROTECTIVE METAL GRATING.
 9. REMOVE EXISTING DOOR AND FRAME COMPLETE.
 10. DEMOLISH AND REMOVE UPPER PORTION OF ORIGINAL CONCRETE FOUNDATION WALL AND LIMESTONE STEPS AS REQUIRED FOR NEW WORK. ADD TEMPORARY BRACING/SHORING UNTIL NEW WORK CAN SUPPORT EXISTING STRUCTURE. VERIFY HEIGHTS WITH SECTIONS.
 11. SAW CUT AND REMOVE STRUCTURAL FLOOR SLAB OVER BASEMENT AS REQUIRED FOR NEW WORK. BRACE MASONRY WALLS UNTIL SLAB IS REPLACED AND CURED TO MIN. 75% OF DESIGN STRENGTH.
 12. REMOVE EXISTING ELECTRICAL PANEL AND ASSOCIATED CONDUIT. SEE ELECTRICAL.
 13. REMOVE AND SALVAGE EXISTING MONOLITHIC STONE BLOCKS.
 14. DEMOLISH AND REMOVE UPPER 24" OF EXISTING FOUNDATION WALL. EXTERIOR STEPS AND REMAINING WALL WILL BE BURIED IN PLACE.
 15. DEMOLISH AND REMOVE CONCRETE BEAM AND UPPER PORTION OF EXISTING CONCRETE COLUMNS AS REQUIRED FOR NEW WORK.
 16. REMOVE EXISTING LIGHT FIXTURE AND ASSOCIATED WIRING. PREPARE BURIED CONDUIT FOR NEW WORK. SEE ELECTRICAL DRAWINGS.
 17. REMOVE AND SALVAGE EXISTING BRONZE LIGHT BASES FOR CLEANING AND RESTORATION.
 18. REMOVE AND SALVAGE EXISTING WALL MOUNTED FLAG HOLDERS. RETURN TO OWNER.
 19. CORE DRILL 6" DIAMETER HOLES IN EXISTING BASEMENT SLAB FOR DRAINAGE (TYPICAL 6 LOCATIONS)

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly registered professional under the laws of the State of Wisconsin.

REVISION NUMBER	DATE	DESCRIPTION

PROJECT: RIVERSIDE PARK BANDSTAND RENOVATION
CITY OF LA CROSSE, WI


DATE: JULY 12, 2018
DRAWN BY: BA
CHECKED BY: MWS

PROJECT No: 1325B
DRAWING TITLE: DEMOLITION ELEVATIONS

SHEET NUMBER
AD200

river ARCHITECTS
740 7th Street North, La Crosse, WI 54601-3508 Tel: 608 785-2217

7/12/2018 4:24:31 PM

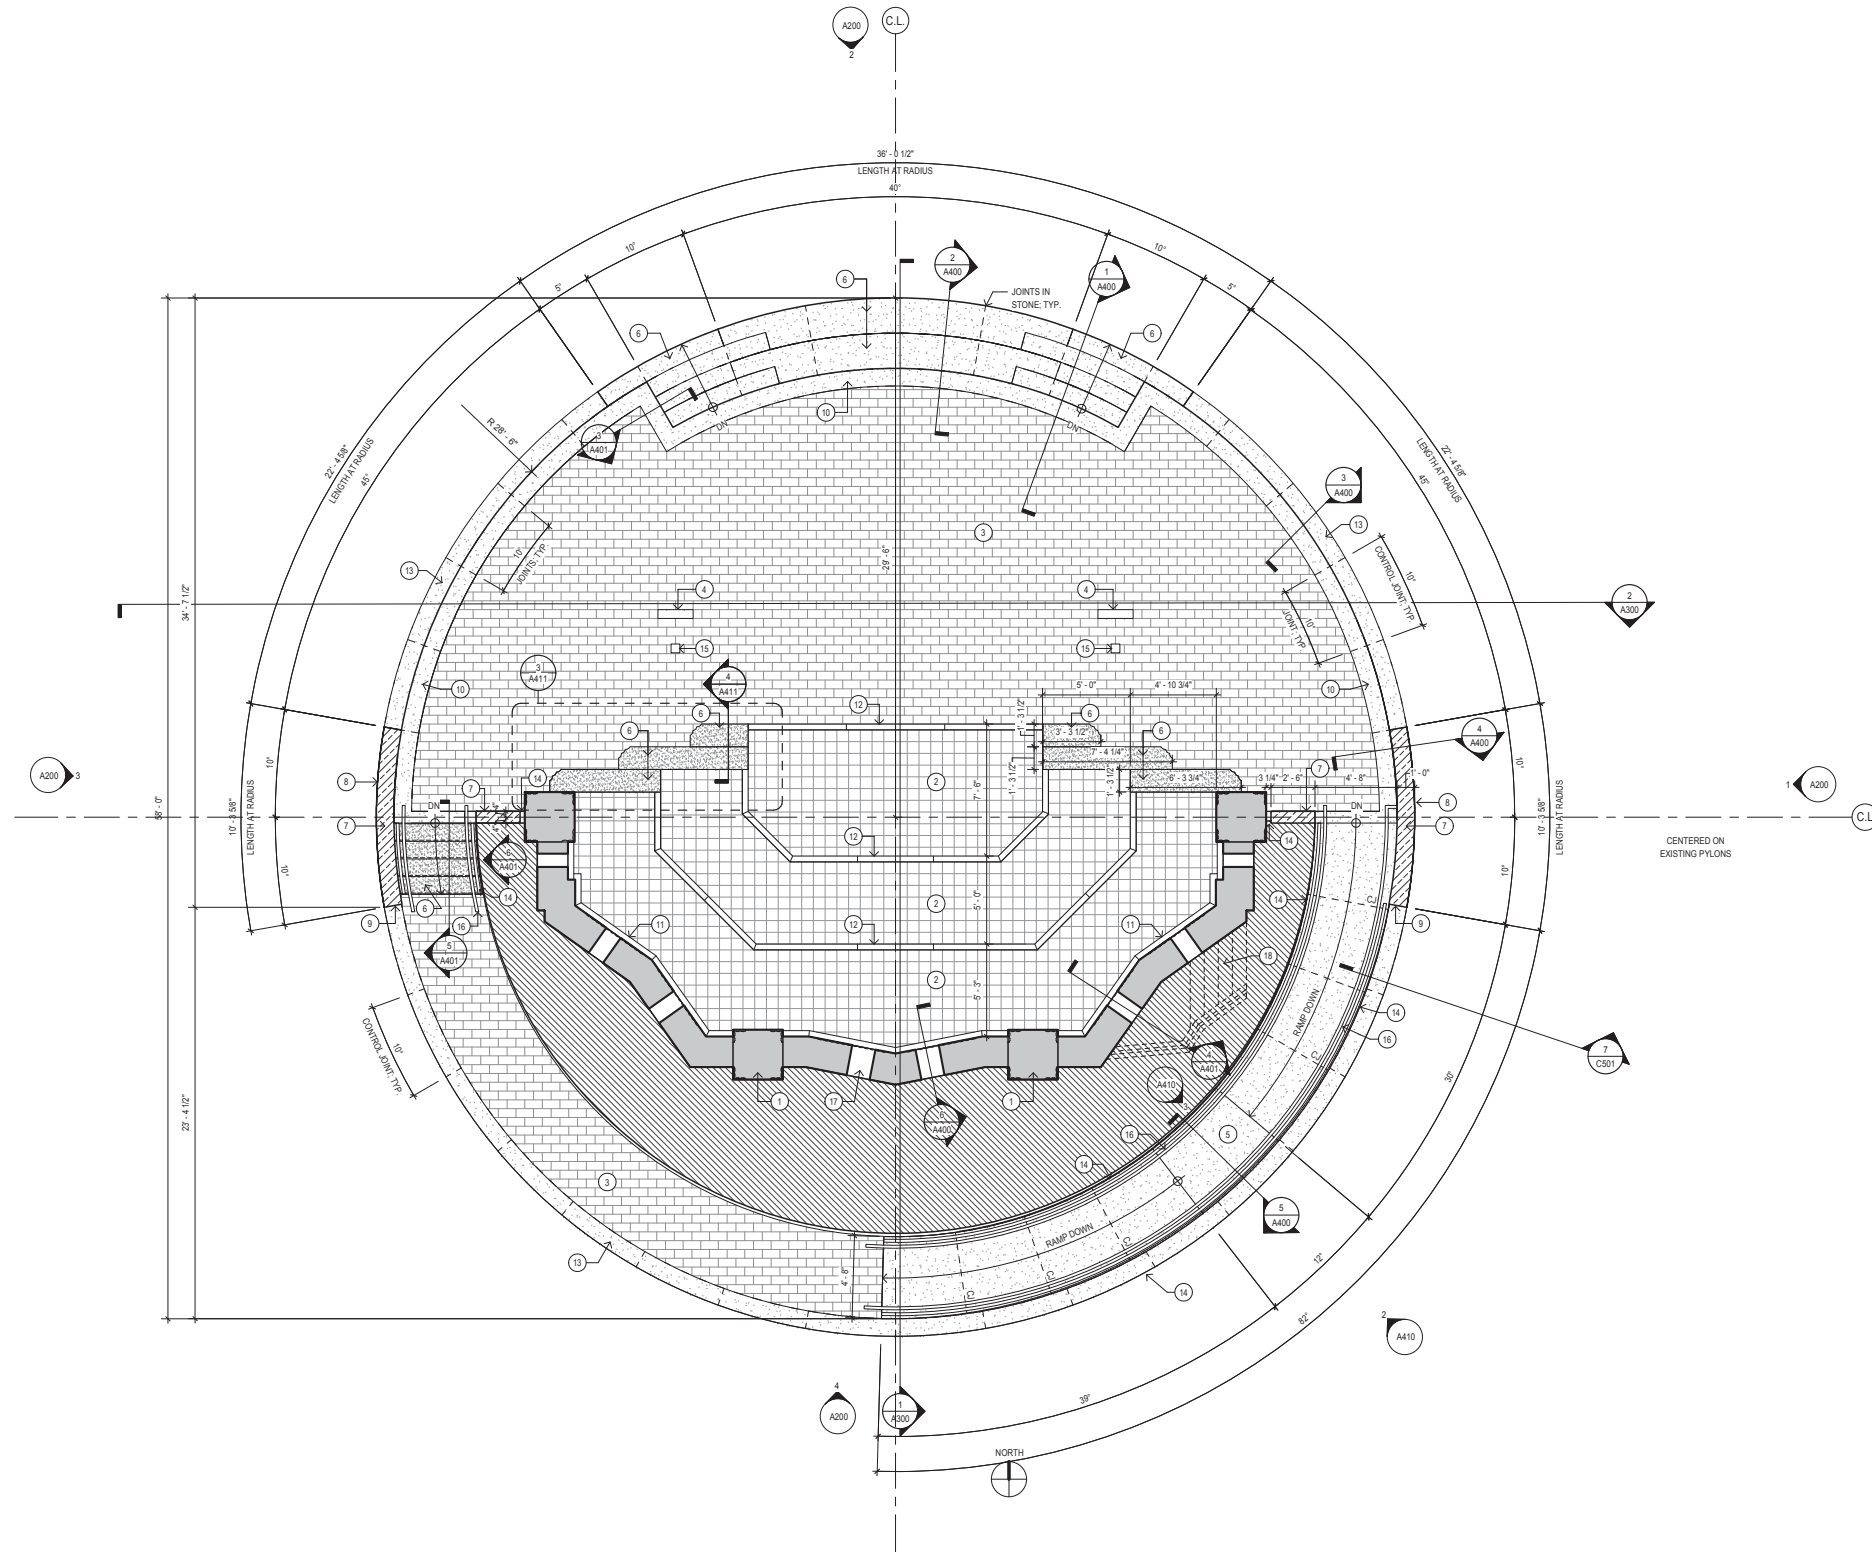

1 BANDSTAND FLOOR PLAN
A100
1/4" = 1'-0"

- GENERAL NOTES:**
1. FIELD VERIFY EXISTING CONDITIONS PRIOR TO SUBMITTING BID AND NOTIFY ARCHITECT OF DISCREPANCIES.
 2. PRIOR TO ANY EARTHWORK ACTIVITY, ALL EROSION CONTROL MEASURES SHALL BE INSTALLED, AND APPROPRIATE PERMITS SHALL BE OBTAINED.
 3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING THE EXACT LOCATION OF ALL EXISTING UTILITIES, WHETHER SHOWN ON THESE PLANS OR NOT, BEFORE COMMENCING WORK AND SHALL BE FULLY RESPONSIBLE FOR ANY AND ALL DAMAGES WHICH MIGHT BE CAUSED BY THE CONTRACTOR'S FAILURE TO EXACTLY LOCATE AND PRESERVE ANY AND ALL UTILITIES. **CALL DIGGERS HOTLINE (800) 240-8911**
 4. ALL DIMENSIONS TO FACE OF FRAMING UNLESS NOTED OTHERWISE.
 5. REFER TO CIVIL DRAWINGS FOR PAVEMENT DETAILS.
 6. ALL DIMENSIONS TO FACE OF FRAMING U.N.O.

- SHEET KEYNOTES:**
1. EXISTING CONSTRUCTION TO REMAIN SHOWN SHADED
 2. PAVER TYPE: 8" x 8" x 2" CONCRETE PAVERS OVER CONCRETE SLAB, STOCK BOND JOINT PATTERN
 3. PAVER TYPE: 8" x 6" x 12" CONCRETE PAVERS OVER 5" CONCRETE SLAB, RUNNING BOND JOINT PATTERN
 4. LINEAR DRAIN: SEE PLUMBING, COORDINATE LOCATION WITH PAVER LAYOUT
 5. C.I.P. CONCRETE RAMP: SEE SHEET A410 FOR DETAILS
 6. MONOLITHIC LIMESTONE STEPS - PIN + EPOXY TO FOUNDATIONS LAB
 7. SOLID LIMESTONE BLOCK WALL - PIN + EPOXY TOGETHER
 8. SPLIT FACED FINISH FRONT + BACK SIDES
 9. SMOOTH FINISH ON TOP SURFACE + ENDS, TYP.
 10. LIMESTONE WALL COPING - SMOOTH FINISH
 11. LIMESTONE TRIM ABUTTING EXISTING STRUCTURE - SMOOTH FINISH
 12. LIMESTONE RISER CURBS - SMOOTH FINISH
 13. INTEGRAL CONCRETE CURB
 14. 3/8" WEATHERING STEEL COR-TEN PANELS - PIN + EPOXY TO FOUNDATION/STONE, SEE ELEVATIONS
 15. RECESSED ELECTRICAL FLOOR BOX - COORDINATE LOCATION WITH ELECTRICAL DRAWINGS AND PAVER LAYOUT
 16. STAINLESS STEEL GUARDRAIL HANDRAIL
 17. ALL EXISTING MORTAR AND SEALANT JOINTS AT EXISTING LIMESTONE TO BE REMOVED AND NEW SEALANT JOINTS SILICA SAND MORTAR TO BE PROVIDED - ALL EXISTING MASONRY TO BE CLEANED
 18. FILL BURY EXISTING CONCRETE STEPS AND REMAINING FOUNDATION WALL

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly registered professional engineer in the State of Wisconsin.

DATE: _____
 PROJECT: _____
 DRAWN BY: _____
 CHECKED BY: _____

REVISION	NO.	DATE	DESCRIPTION


PROJECT: RIVERSIDE PARK BANDSTAND RENOVATION
 CITY OF LA CROSSE, WI

DATE: JULY 12, 2018
 DRAWN BY: BA
 CHECKED BY: MWS


PROJECT No: 13258
 DRAWING TITLE: FLOOR PLAN

SHEET NUMBER
A100


7/12/2018 4:04:48 PM

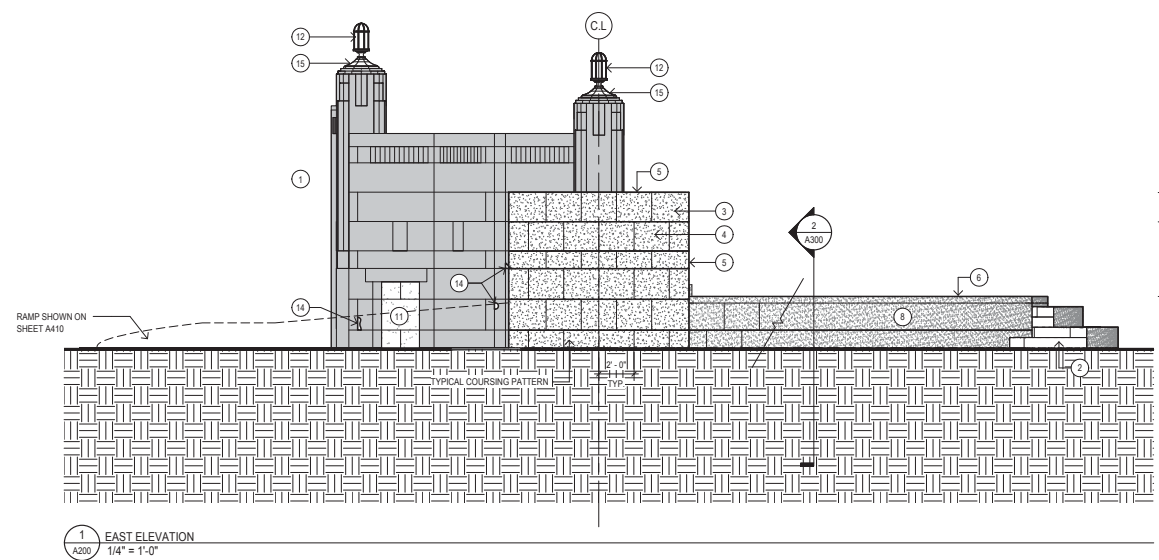


1 EAST ELEVATION
A200
1/4" = 1'-0"

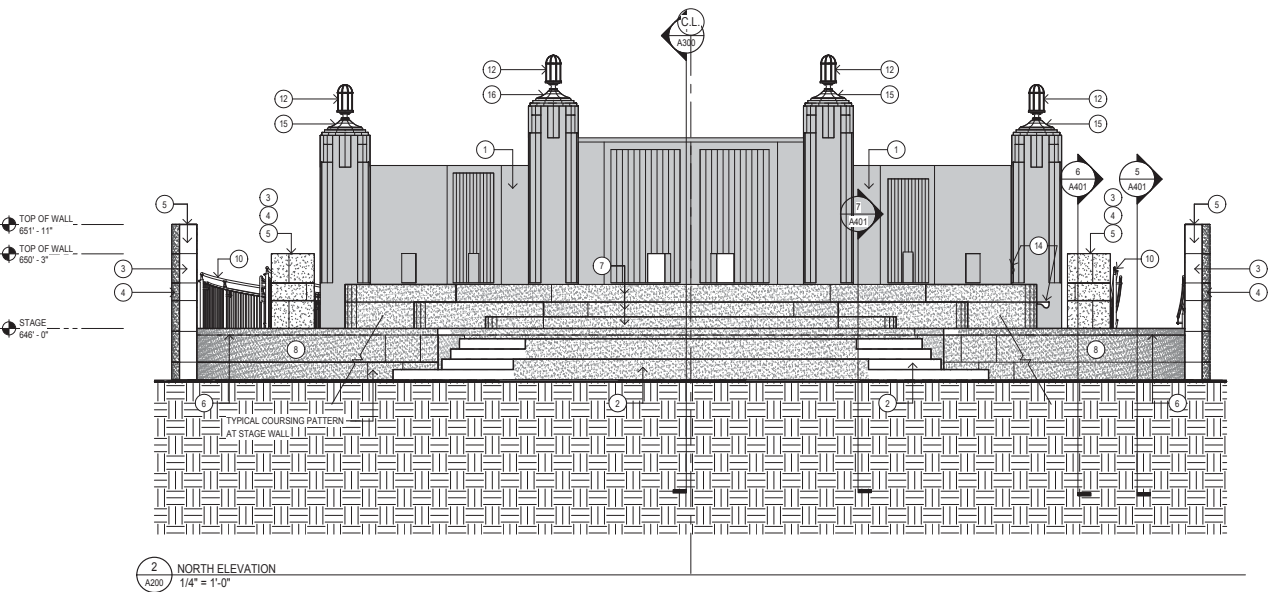

2 NORTH ELEVATION
A200
1/4" = 1'-0"

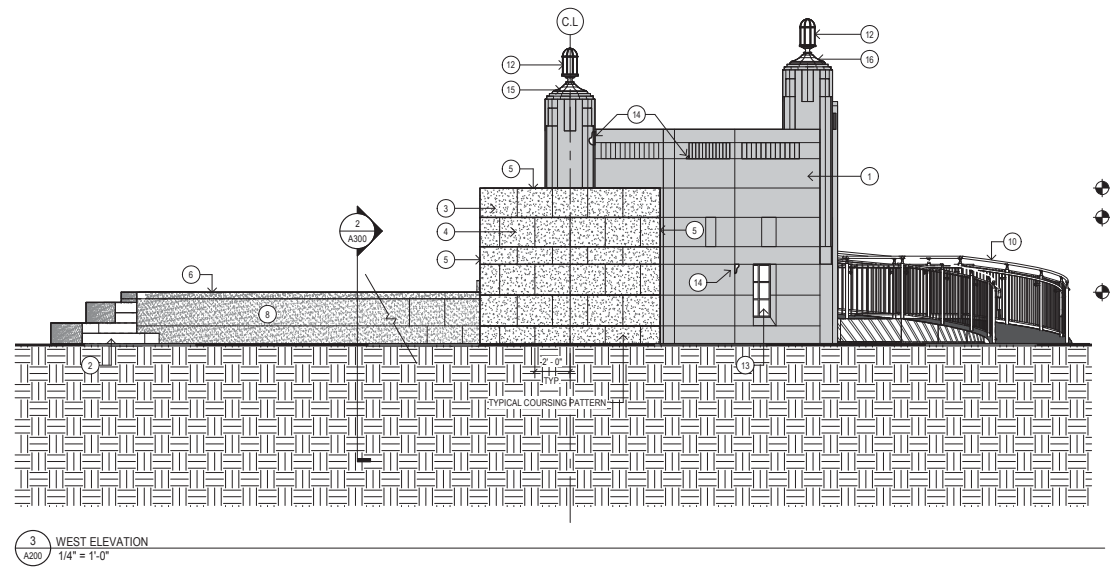

3 WEST ELEVATION
A200
1/4" = 1'-0"

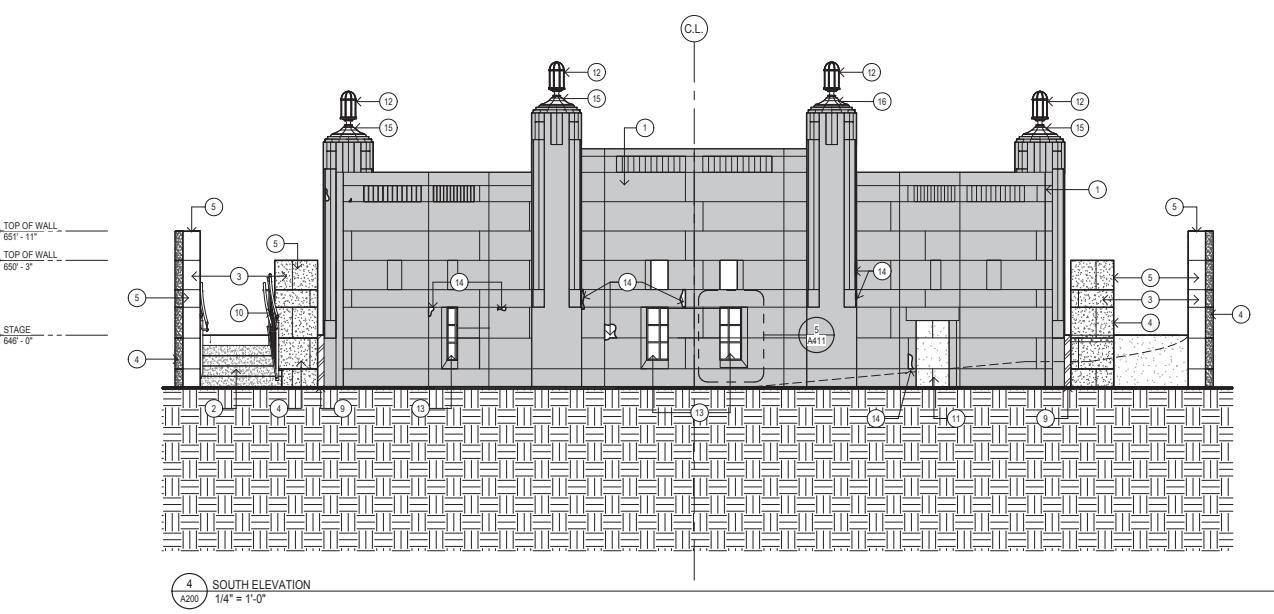

4 SOUTH ELEVATION
A200
1/4" = 1'-0"

- GENERAL NOTES:**
1. REMOVE ALL ABANDONED/UNUSED ANCHORS/FASTENERS IN EXISTING LIMESTONE MASONRY. PATCH HOLES. REFER TO SECTION 04 41 41 - MASONRY RESTORATION AND CLEANING.
 2. EXISTING LIMESTONE MASONRY TO RECEIVE 100% JOINT POINTING.
 3. MASONRY JOINTS IN HORIZONTAL SURFACES (WALL CAPS, SILLS) TO RECEIVE POINTING EXECUTION 'A' - NEW SEALANT JOINT.
 4. MASONRY JOINTS IN VERTICAL SURFACES (WALLS) TO RECEIVE POINTING EXECUTION 'B' - NEW MORTAR JOINT.
- SHEET KEYNOTES:**
1. EXISTING CONSTRUCTION FINISHES TO REMAIN. ALL EXISTING MORTAR AND SEALANT JOINTS AT LIMESTONE MASONRY TO BE REMOVED AND NEW SEALANT JOINTS/SILICA SAND MORTAR TO BE PROVIDED - ALL EXISTING LIMESTONE TO BE CLEANED.
 2. MONOLITHIC LIMESTONE STEPS - PIN + EPOXY TO FOUNDATIONS/LAB.
 3. SOLID LIMESTONE BLOCK WALL - PIN + EPOXY TOGETHER.
 4. SPLITFACED FINISH FRONT + BACK SIDES.
 5. SMOOTH FINISH ON TOP SURFACE + ENDS, TYP.
 6. LIMESTONE WALL COPING - SMOOTH FINISH.
 7. LIMESTONE RISER CURBS - SMOOTH FINISH.
 8. LIMESTONE VENEER (RADIUS FACE, FLAT BACK) - SMOOTH FINISH.
 9. 3/8" WEATHERING STEEL (COR-TEN) PANELS - PIN + EPOXY TO FOUNDATION/STONE. SEE ELEVATIONS.
 10. STAINLESS STEEL GUARDRAIL/HANDRAIL.
 11. INFILL EXISTING OPENING WITH LIMESTONE VENEER PANELS - SMOOTH FINISH. MATCH EXISTING COURSING.
 12. NEW HISTORIC REPRODUCTION LIGHT FIXTURES (4 TOTAL).
 13. REINSTALL SALVAGED AND REPAIRED METAL WINDOWS IN EXISTING OPENINGS, TYP. (3 TOTAL); SEE DETAIL S4411.
 14. REPAIR DAMAGED LIMESTONE PANEL.
 15. REINSTALL (3) SALVAGED AND CLEANED BRONZE LIGHT BASES.
 16. PROVIDE AND INSTALL (1) NEW REPLICA METAL LIGHT BASE TO MATCH SALVAGED UNITS.

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly registered professional under the laws of the State of Wisconsin.

DATE: _____
 DESIGNER: _____
 PROJECT: _____
 DRAWING TITLE: _____
 CHECKED BY: _____

REVISION	NO.	DATE	DESCRIPTION

PROJECT: RIVERSIDE PARK BANDSTAND RENOVATION
 CITY OF LA CROSSE, WI

DATE: JULY 12, 2018
 DRAWN BY: BA
 CHECKED BY: MWS

PROJECT No: 1325B
 DRAWING TITLE: ELEVATIONS

SHEET NUMBER
A200

river ARCHITECTS
 740 7th Street North, La Crosse, WI 54601-3508 Tel: 608 785-2217