

Site location:


Proposed site by Engineering for a new concrete sidewalk pad to be installed by the City. Location indicated by arrow and marked with an "X"





Bike Rack Details:

1. Madrax (new)

- a. Dimensions of rack = 16'6" L, 30" W, 61" H (sign frame) & 34" H (rack sections)
- b. Footprint (min area supporting rack only) = 16'6" L x 30" W
- c. Area clearance needed (min for bike in/out access unless a abutting public right away) = 19' L x 8'6" W (single side access-required) & 19' L x 14' W (double side access-optional)
- d. Recommended for placement on concrete or hard surface adequate for bolt anchoring (& seasonal removal if desired by location); hard surface pad area = 6' by 18' min, 6' by 19-20' best

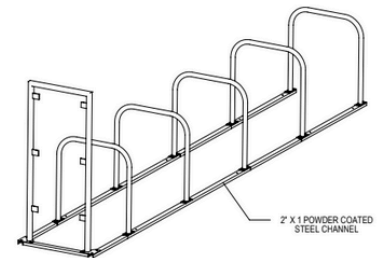

Jacob Sciammas 2/10/22

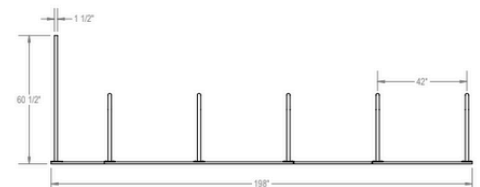

PRODUCT: UX158-10-SIGN
DESCRIPTION: UX158 10" ON RAIL BIKE RACK
10 BIKE, 5 LOOP, SURFACE
DATE: 2-1-2022
ENG: BLW