


GENERAL NOTES


DETAILS OF CONSTRUCTION, MATERIALS, AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

SURVEY MONUMENT SHALL BE EXCAVATED BY USE OF A CIRCULAR AUGER.


IF A SURVEY MONUMENT REQUIRES A DEEP FORM BECAUSE OF LOOSE DIRT OR FILL, THE FORM SHALL BE REMOVED BEFORE BACKFILLING AROUND THE BASE. BACKFILL SHALL BE TAMPED TIGHT AGAINST THE BARE CONCRETE BASE IN LAYERS OF 1 FOOT OR LESS.

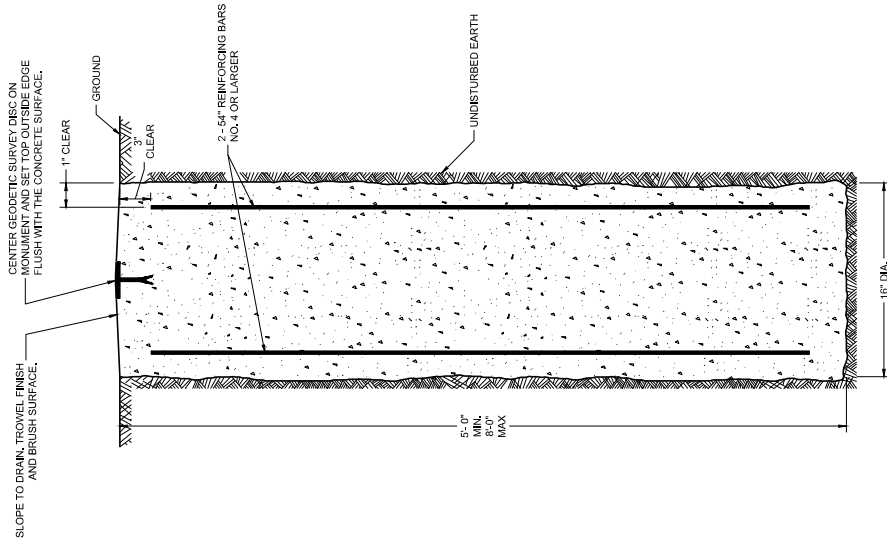

**CAST-IN-PLACE
CONCRETE MONUMENT**

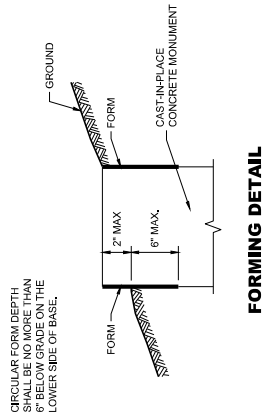

FORMING DETAIL



**GEODETIC SURVEY DISC
FURNISHED BY WISDOT**

**GEODETIC SURVEY
MONUMENT**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
JUNE 2025
DATE

RS/ DAVID L LAYTON
CHIEF SURVEY AND MAPPING ENGINEER

FWA