GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

SURVEY MONUMENT SHALL BE EXCAVATED BY USE OF A CIRCULAR AUGER.

IF A SURVEY MONUMENT REQUIRES A DEEP FORM BECAUSE OF LOOSE DIRT OR FILL, THE FORM SHALL BE REMOVED BEFORE BACKFILLING AROUND THE BASE. BACKFILL SHALL BE TAMPED TIGHT AGAINST THE BARE CONCRETE BASE IN LAYERS OF 1 FOOT OR LESS.

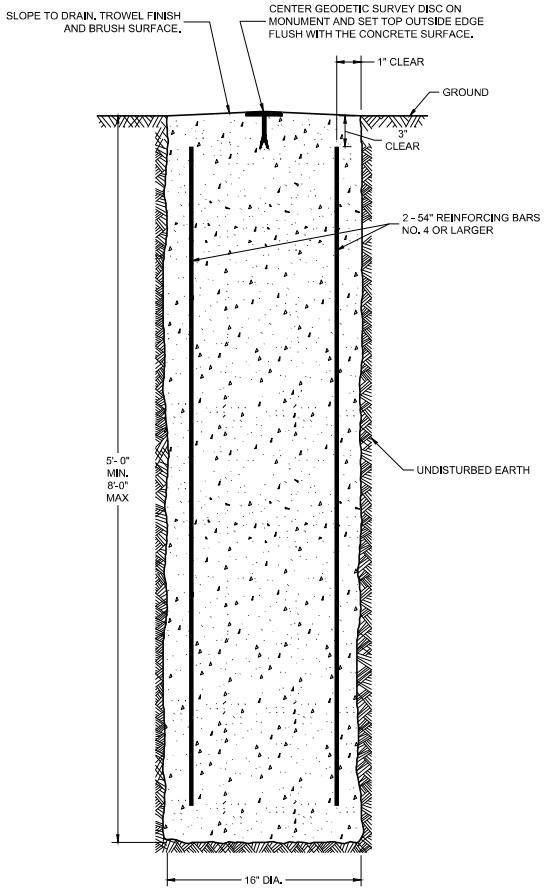

CAST-IN-PLACE CONCRETE MONUMENT

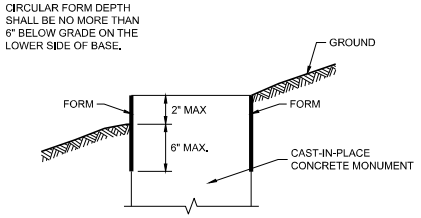

FORMING DETAIL



GEODETIC SURVEY DISC
FURNISHED BY WISDOT

GEODETIC SURVEY MONUMENT	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED June 2025 DATE	/S/ DAVID J. LAYTON CHIEF SURVEY AND MAPPING ENGINEER
FHWA	

6

SDD 16A02-01

6

SDD 16A02-01