




SITE GRADING & EROSION CONTROL - GENERAL NOTES

- GRADE, LINE, AND LEVEL TO BE REVIEWED IN THE FIELD BY THE PROJECT MANAGER.
- THE SITE CONTRACTOR SHALL INSTALL AND MAINTAIN ALL EROSION CONTROL ELEMENTS IN ACCORDANCE WITH THE DEPARTMENT OF NATURAL RESOURCES AND THE LOCAL GOVERNING AUTHORITIES REGULATIONS.
- PLACE INLET PROTECTION UNDER THE PROPOSED AND EXISTING CATCH BASINS, MANHOLES, AND INLETS GRATES FOR THE DURATION OF CONSTRUCTION.
- ALL ACTIVITIES SHALL BE CONDUCTED IN A LOGICAL SEQUENCE AS TO MINIMIZE THE AMOUNT OF BARE SOIL EXPOSED AT ANY ONE TIME. MAINTAIN EXISTING VEGETATION AS LONG AS POSSIBLE.
- PLACE TEMPORARY SEED IF DISTURBED AREAS WILL NOT BE RESTORED IMMEDIATELY AFTER ROUGH GRADING. TEMPORARY SEED SHALL BE PLACED IN ACCORDANCE WITH SECTION 630 OF THE STATE OF WISCONSIN STANDARD SPECIFICATIONS FOR HIGHWAY AND STRUCTURE CONSTRUCTION.
- INSPECT ALL EROSION CONTROL ELEMENTS WEEKLY OR AFTER STORM EVENTS OF 1/2" OF RAIN OR GREATER AND DOCUMENT IN ACCORDANCE WITH THE REQUIREMENTS OF THE DEPARTMENT OF NATURAL RESOURCES.
- DISTURBED GROUND OUTSIDE OF THE EVERYDAY CONSTRUCTION AREA, INCLUDING SOIL STOCKPILES LEFT INACTIVE FOR MORE THAN 10 DAYS, SHALL AT A MINIMUM BE TEMPORARILY STABILIZED BY SEEDING/MULCHING OR OTHER METHODS APPROVED BY THE LOCAL GOVERNING AUTHORITY'S EROSION CONTROL INSPECTOR.
- ALL OFF SITE SEDIMENT DEPOSITS OCCURRING AS A RESULT OF CONSTRUCTION WORK OR A STORM EVENT SHALL BE CLEANED UP BY THE END OF EACH DAY. FLUSHING SHALL NOT BE ALLOWED.
- ALL SEDIMENT LADEN WATER PUMPED FROM THE SITE SHALL BE TREATED BY A TEMPORARY SEDIMENT BASIN OR BE FILTERED BY OTHER APPROVED MEANS. WATER SHALL NOT BE DISCHARGED IN A MANNER THAT CAUSES EROSION OF THE SITE OR RECEIVING CHANNELS.
- EROSION CONTROL DEVICES DESTROYED AS A RESULT OF CONSTRUCTION ACTIVITIES SHALL BE REPAIRED BY THE END OF THE WORK DAY.
- TEMPORARY EROSION CONTROL MEASURES SHALL BE REMOVED AT THE CONCLUSION OF CONSTRUCTION AFTER STABILIZATION OF DISTURBED SOIL HAS OCCURRED.
- ALL WASTE AND UNUSED BUILDING MATERIALS SHALL BE PROPERLY DISPOSED OF AND NOT ALLOWED TO BE CARRIED OFF-SITE BY RUNOFF OR WIND.
- SEED / FERTILIZE / AND CRIMP MULCH ALL GENERAL LANDSCAPE AREAS DISTURBED DURING CONSTRUCTION IN ACCORDANCE WITH THE PROJECT MANUAL SPECIFICATIONS AND WITHIN 3 WORKING DAYS OF FINAL GRADING.
- ALL EROSION CONTROL ELEMENTS SHALL REMAIN IN PLACE UNTIL A SUFFICIENT GROWTH OF GRASS IS ESTABLISHED IN ALL GENERAL LANDSCAPE AREAS, AND THEN REMOVED BY THE SITE CONTRACTOR.
- IN THE CASE OF LATE SEASON AND WINTER CONSTRUCTION, RESTORATION/LANDSCAPING OF THE SITE SHALL OCCUR NO LATER THAN JUNE 1ST OF THE NEXT CONSTRUCTION SEASON. EROSION CONTROL MEASURES SHALL REMAIN INTACT UNTIL FINAL RESTORATION OF THE SITE IS COMPLETE. FABRIC INSIDE THE INLET AND CATCH BASIN GRATING SHALL BE REMOVED AS SOON AS FREEZING WEATHER OCCURS SO DRAINAGE IS NOT IMPAIRED THROUGHOUT THE WINTER MONTHS. ALL EROSION CONTROL PRACTICES REMOVED OR DAMAGED DUE TO WINTER WEATHER SHALL BE REPLACED IN THE SPRING IMMEDIATELY AFTER THE THAW.
- MATCH GRADES SHOWN ARE APPROXIMATE. CONTRACTOR TO VERIFY MATCH GRADES AND CONFIRM DESIGN INTENT PRIOR TO CONSTRUCTION OF FINISHED GRADES.

GRADING LEGEND

PROPOSED CONTOURS	— 678 —
EXISTING CONTOURS	— 975 —
PROPOSED SPOT ELEVATION	975.00
PROPOSED FINISH FLOOR ELEVATION	FFE 975.00
PROPOSED RIM ELEVATION	R 975.00
PROPOSED FLOWLINE ELEVATION	FL 975.00
PROPOSED INVERT ELEVATION	I 975.00
PROPOSED TOP OF STAIR ELEVATION	TS 975.00
PROPOSED BOTTOM OF STAIR ELEVATION	BS 975.00
MATCH EXISTING ELEVATION	M 975.00
APPROXIMATE PROJECT LIMITS	---

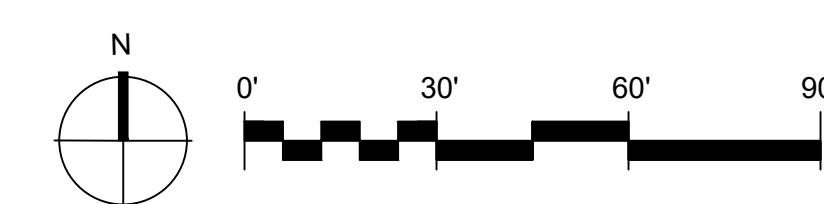

PRELIMINARY
NOT FOR CONSTRUCTION

DD	06/20/2022
MARK	DATE
ISSUED:	06/20/2022
PROJECT N	22406
DRAWN BY:	T. SCHMENK
CHECKED BY:	C. RETTLER
COPYRIGHT © 2022 HOFFMAN PLANNING, DESIGN & CONSTRUCTION, INC.	

Site Grading & Erosion Control Plan

CG-101